
Receptacle

KS-747 23 M-R

Item KS-74723M-R

GO TO PRODUCT


ingun®
Partner for Future Technology

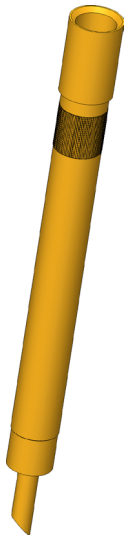



1:1



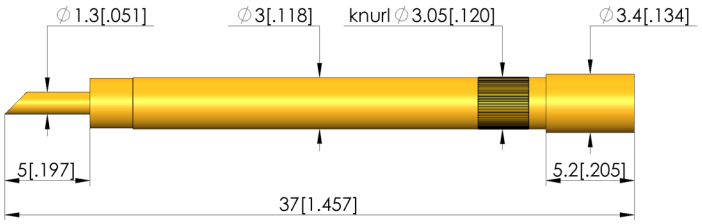

General data

Product group:	Receptacles (KS)
Series:	KS-747
Sub-series:	KS-747 M screw-in version
Type of receptacle connection:	Solder / open
Press ring:	No
Surface area:	Gold
Collar diameter:	3.4 mm [.133 in]
Collar height:	5.2 mm [.204 in]
Knurl:	Yes
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	3.00 - 3.02 mm [.118 - .118 in]
Mounting hole in FR4:	3.00 - 3.02 mm [.118 - .118 in]
Mounting hole with press ring in CEM1:	nein mm
Mounting hole with press ring in FR4:	nein mm

Mechanical data

Total length:	37 mm [1.45 in]
Outer diameter:	3 mm [.118 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB