

Basic Contact Probes

F56212B190G100B

Item number 1001219

General

Design	Basic Contact Probe
Type/family	F562
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+100°C
Additional definition	B

Electrical specifications

Continuous current (A)	5.00
Typical contact resistance (mOhm)	20.00

Mechanical specifications


Preload (cN)	60.00
Spring force (cN)	100.00
Nominal travel (mm)	2.70
Maximum travel (mm)	4.10
Pointing accuracy +/- (mm)	0.05

Dimensions

Total length (mm)	24.70
Projection height (mm)	6.20
Tip style diameter (mm)	1.90
Barrel diameter (mm)	1.37

Family drawing

All measurements are in mm.

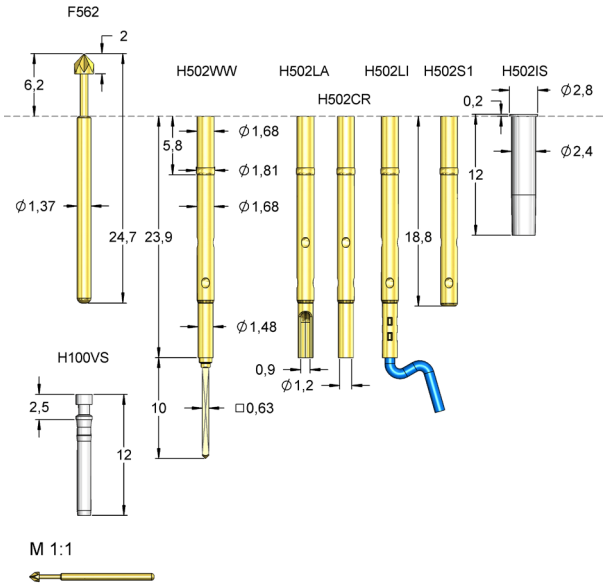

Materials & surfaces

Tip style	12
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Nickel silver
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver