
Receptacle

KS-672 D06 M10 M5 V-R-AC

Item KS-672-0007

GO TO PRODUCT

ingun®
Partner for Future Technology

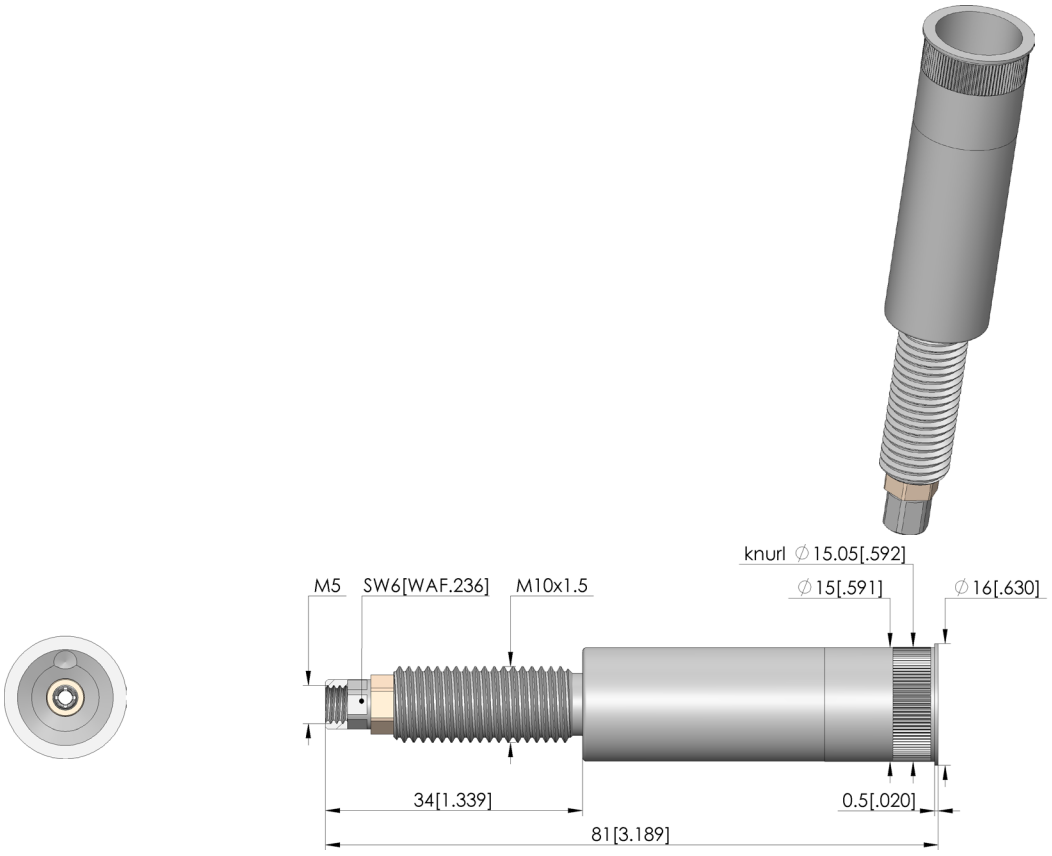

General data

Product group:	Receptacles (KS)
Series:	KS-672
Sub-series:	KS-672 M-V06 screw-in version for 6 mm VKR
Type of receptacle connection:	Thread (M)
Press ring:	No
Surface area:	Silver
Collar diameter:	16 mm [.629 in]
Collar height:	0.5 mm [.019 in]
Knurl:	Yes
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	15.00 - 15.02 mm [.590 - .591 in]
Mounting hole in FR4:	15.00 - 15.02 mm [.590 - .591 in]

Mechanical data

Total length:	81 mm [3.18 in]
Outer diameter:	15 mm [.590 in]

Wiring data

Insulating material:	PEEK

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB