

Pogo Connectors

P14611B107G070L062NM

Item number 1031088

General

Design	Basic Contact Probe
Type/family	P / P146-L062
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+100°C
Additional definition	NM

Electrical specifications

Continuous current (A)	10.00
Typical contact resistance (mOhm)	60.00

Mechanical specifications


Preload (cN)	25.00
Spring force (cN)	70.00
Nominal travel (mm)	0.50
Maximum travel (mm)	1.00
Pointing accuracy +/- (mm)	0.06

Dimensions

Total length (mm)	6.20
Projection height (mm)	1.15
Tip style diameter (mm)	1.07
Barrel diameter (mm)	1.46

Family drawing

All measurements are in mm.

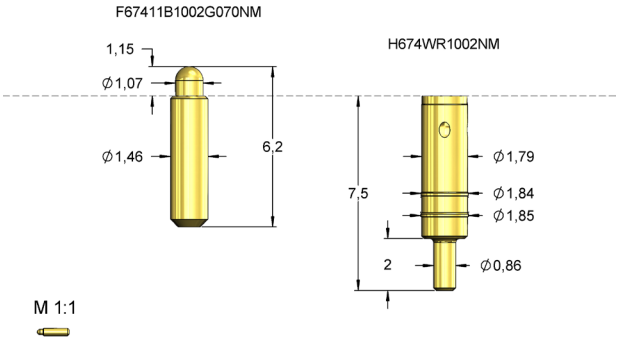

Materials & surfaces

Tip style	11
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Cooper
Spring plating	Silver