Contact clamp


KK-541 400 FC 1410 30 3S05 A


Item KK-541-0001

GO TO PRODUCT


ingun®
Partner for Future Technology




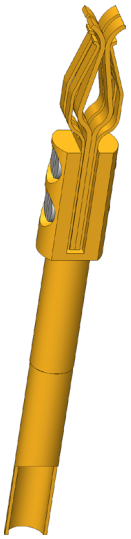





1:1

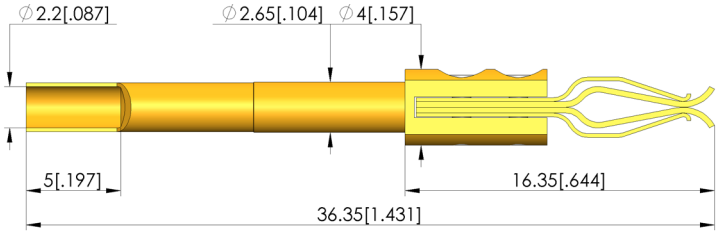





Example of contact at working stroke

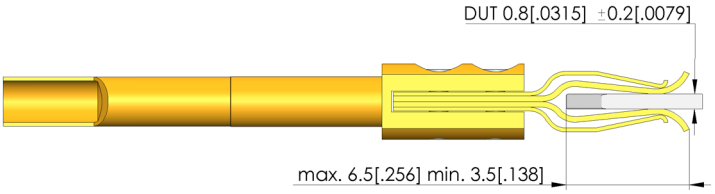

Contact clamp

KK-541 400 FC 1410 30 3S05 A

Item KK-541-0001

GO TO PRODUCT

Partner for Future Technology

General data

Product group:	High-current test probe
Sub-product group:	High-current clamps (flat/round)
Series:	KK-541 press-in
Grid:	3.5 mm [137 mil]
Contacting from:	Flat contact
Magnetic:	Yes
Installation type:	Press-in
Quick-exchange system:	No
Type of test probe connection:	Solder connection
Adjustable installation height:	No
Non-rotating:	Yes
Min. temperature:	- 100 °C [- 212 °F]
Max. temperature:	+ 200 °C [+ 392 °F]
RoHS-compliant:	RoHS-3;6c

Electrical data

Current load capacity / rated current:	20 A
Typical resistance (Ri):	<5 mOhm

Mechanical data

Total length:	36.35 mm [1.43 in]
Barrel diameter:	2.65 mm [.104 in]
Collar height:	07

Tip style data

Tip style surface:	A gold
Tip style material:	3 CuBe

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB