
Spring-loaded rotating test probe

DKS-050 207 090 G 2000


Item DKS-050-0002


GO TO PRODUCT

ingun®
Partner for Future Technology

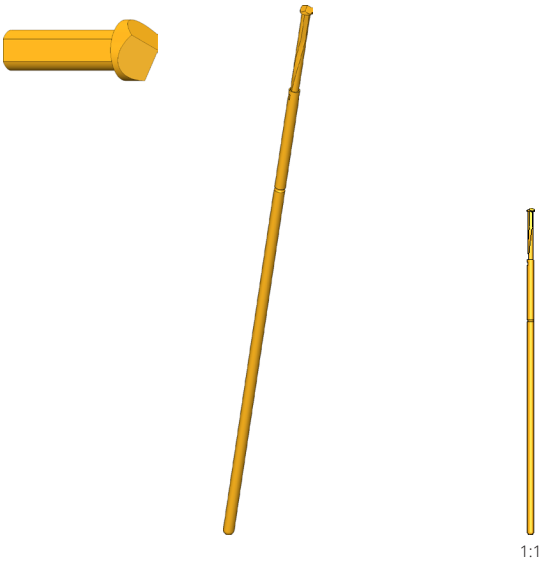

1:1

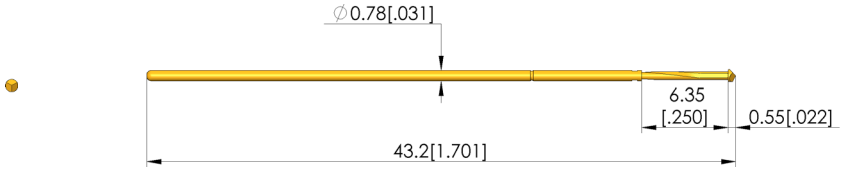



General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Rotating test probes
Series:	DKS-050
Grid:	1.27 mm [50 mil]
Contacting from:	Pad, via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-050
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	<20 mOhm

Mechanical data

Total length:	43.2 mm [1.70 in]
Barrel diameter:	0.78 mm [.030 in]
Maximum stroke:	6.35 mm [.25 in]
Spring pre-load:	1.03 N [3.70 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	4.3 mm [.169 in]

Tip style data

Tip style:	07 90° 3-edged chisel, self-cleaning
Tip diameter:	0.9 mm [.035 in]
Tip style surface:	G aurun
Tip style material:	2 steel

ICT/FCT TEST PROBES


Spring-loaded rotating test probe

DKS-050 207 090 G 2000

Item DKS-050-0002

GO TO PRODUCT

Partner for Future Technology

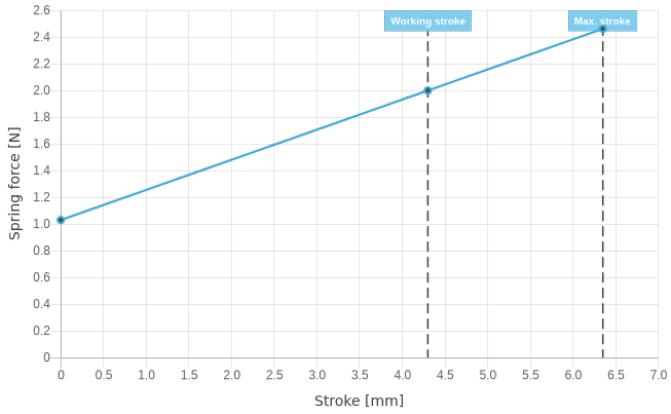

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
ICT/FCT Test probes

ICT/FCT TEST PROBES

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com