Coaxial cable, pre-wired

SE-K11527-50010MG075


Item SE-K11527-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)


INGUN SELECTION





1:1



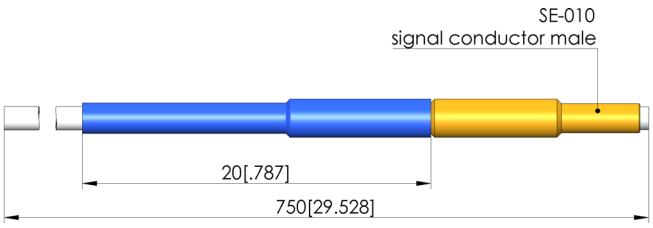

General data

Product group:	Assemblies
Series:	SE-K11527
Sub-series:	SE-K11527 plug
Min. temperature:	- 55 °C [- 131 °F]
Max. temperature:	+ 135 °C [+ 275 °F]
RoHS-compliant:	RoHS-3;6c

Cable data

Cable length:	75 cm [29.5 in]
Cable type:	K_01152-07
Kink protection cable:	Shrink-on sleeve, spec., blue, 20 mm
Attenuation Fmax:	0.78 dB

Connector data

Interface 1:	SE-010 plug connector for HFS-010
Interface gender 1:	M signal conductor male / plug
Version 1:	Straight
Interface 2:	Open cable end

Electrical data

Maximum frequency:	0.2 GHz
Impedance:	50 Ohm
Cable shielding:	Simple
Maximum performance:	60 W
Performance coefficient:	27 K11527
Dielectric strength:	0.4 kV
Attenuation coefficient a:	2,21000 K11527
Attenuation coefficient b:	0,25900 K11527

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

PLUG AND CABLE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com