# Test probe, INGUN S-Line

## S-075 291 090 A 2000 S


Item S-075-0052


GO TO PRODUCT

ingun®
Partner for Future Technology

- Use of larger test probes for increased contacting accuracy and longer service life
- Minimal grid dimensions due to omission of receptacles (socketless)
- Large selection of tip styles and spring forces for optimal contact with the test point
- Compatible with existing socketless systems

NEW




### General data

| | |
|---|---|
| Product group: | ICT / FCT (in-circuit test and function test |
| Sub-product group: | INGUN S-Line |
| Series: | S-075 S standard |
| Grid: | 1.91 mm [75 mil] |
| Contacting from: | Pad, via |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Type of test probe connection: | Contact terminal |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Min. temperature: | - 40 °C [- 104 °F] |
| Max. temperature: | + 80 °C [+ 176 °F] |
| RoHS-compliant: | RoHS-3;6a |

### Electrical data

| | |
|---|---|
| Current load capacity / rated current: | 5 A |
| Typical resistance (Ri): | <20 mOhm |

### Mechanical data

| | |
|---|---|
| Total length: | 35.81 mm [1.40 in] |
| Barrel diameter: | 1.37 mm [.053 in] |
| Maximum stroke: | 6.35 mm [.25 in] |
| Spring pre-load: | 0.66 N [2.37 ozf] |
| Collar height: | 00 |
| Spring force at working stroke: | 2 N [7.19 ozf] |
| Recommended working stroke: | 4.3 mm [.169 in] |
| Mounting hole in probe plate (KTP): | 1.39 - 1.41 mm [.054 - .055 in] |
| Mounting hole in S-Line spacer plate (SDP): | min. 1.58 mm [.062 in] |
| KT designation: | KT-S050#KT-S075 |

### Tip style data

| | |
|---|---|
| Tip style: | 91 dagger, self-cleaning |
| Tip diameter: | 0.9 mm [.035 in] |
| Tip style surface: | A gold |
| Tip style material: | 2 steel |

ICT/FCT TEST PROBES


# Test probe, INGUN S-Line

## S-075 291 090 A 2000 S

Item S-075-0052

GO TO PRODUCT

Partner for Future Technology

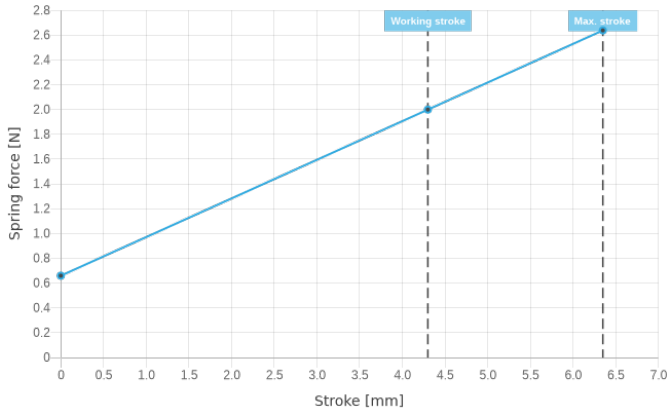


**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB



Learn more about
**ICT/FCT Test probes**

ingun.com

ICT/FCT TEST PROBES