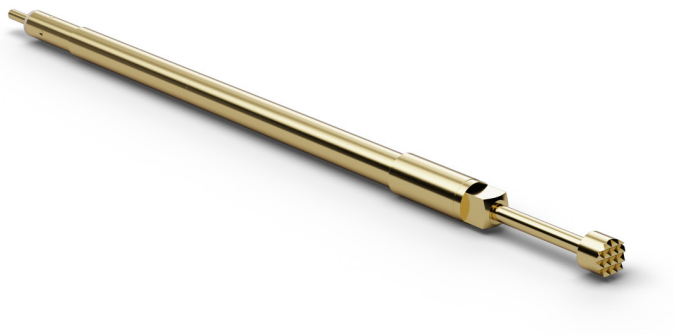


Push-Back-Probes

V0406B300G15

Item number 1014167

General

Design	Basic Contact Probe
Type/family	V04
Pitch (mm/mil)	4,00 / 157
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current (A)	8.00
Typical contact resistance (mOhm)	30.00
Switch travel (mm)	7.50
Continuous current 2 (A)	1.00

Mechanical specifications


Preload (cN)	400.00
Spring force (cN)	1500.00
Nominal travel (mm)	9.50
Maximum travel (mm)	10.00
Pointing accuracy +/- (mm)	0.10
Tool size (mm)	2,5

Dimensions

Total length (mm)	82.00
Projection height (mm)	23.50
Tip style diameter (mm)	3.00
Barrel diameter (mm)	3.00
Collar diameter (mm)	3.60
Press ring diameter (mm)	3.60
C – spade length (mm)	2.50
C – pin length (mm)	2.50

Family drawing

All measurements are in mm.

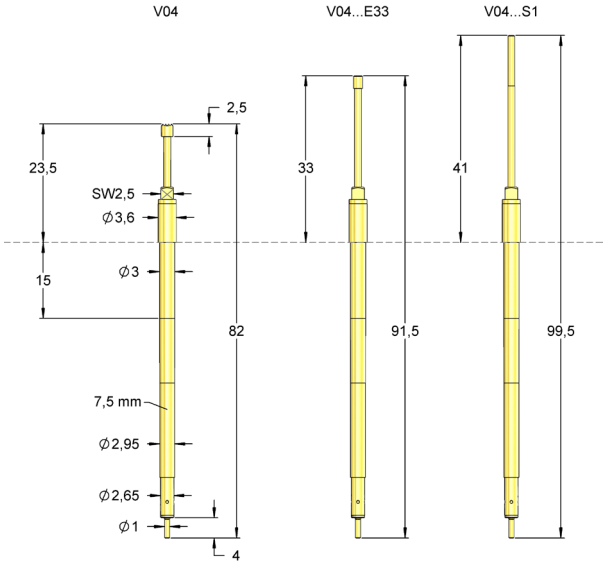

Materials & surfaces

Tip style	06
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver