Receptacle


KS-004 30 G

Item KS-00430G

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION

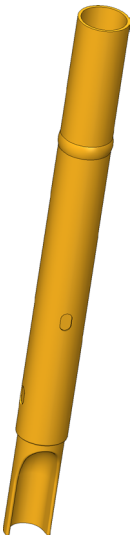



1:1



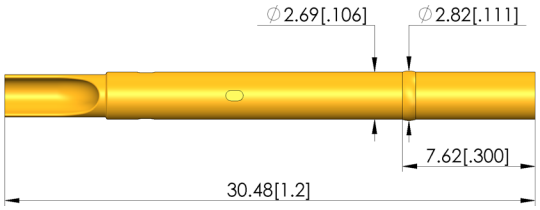

General data

Product group:	Receptacles (KS)
Series:	KS-004
Sub-series:	KS-004 press-in version
Type of receptacle connection:	Solder
Press ring:	Yes
Surface area:	Gold
Collar diameter:	2.8 mm [.110 in]
Collar height:	7.6 mm [.299 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	2.67 - 2.68 mm [.105 - .105 in]
Mounting hole in FR4:	2.67 - 2.68 mm [.105 - .105 in]
Mounting hole with press ring in CEM1:	2.72 - 2.77 mm [.107 - .109 in]
Mounting hole with press ring in FR4:	2.72 - 2.77 mm [.107 - .109 in]

Mechanical data

Total length:	30.5 mm [1.20 in]
Outer diameter:	2.69 mm [.105 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB