Receptacle, pre-wired

KS-050 E08 V-30

Item KS-050E08V-30

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION





1:1



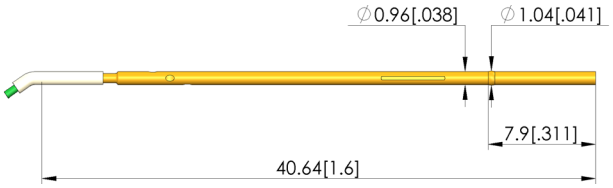

General data

Product group:	Receptacles (KS)
Series:	KS-050
Sub-series:	KS-050 press-in version
Type of receptacle connection:	Pre-wired
Press ring:	Yes
Surface area:	Gold
Collar diameter:	1.04 mm [.040 in]
Collar height:	7.9 mm [.311 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3

Mechanical data

Total length:	40.6 mm [1.59 in]
Outer diameter:	0.95 mm [.037 in]

Wiring data

Wire type AWG:	30 type 2
Wire type:	Solid
Insulating material:	Tefzel
Wire outer diameter:	0.55 mm [.021 in]
Wire length:	1 m [39.3 in]
Wire diameter:	0.25 mm [.009 in]
Wire colour:	Green
Kink protection:	Yes

Mounting hole

Mounting hole in CEM1:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole in FR4:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole with press ring in CEM1:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole with press ring in FR4:	0.98 - 1.00 mm [.038 - .039 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB