

Interface Pin Blocks 100 mil / 2.54 mm

Series FKB5457 - SMD


NEW

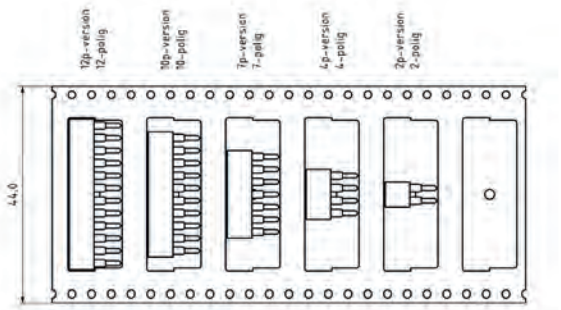

Soldering profile reflow

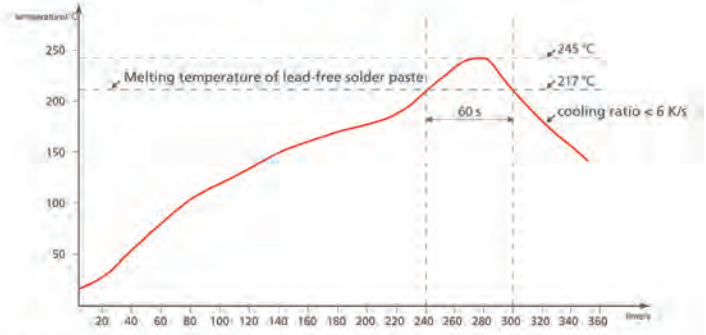

FKB5457/1

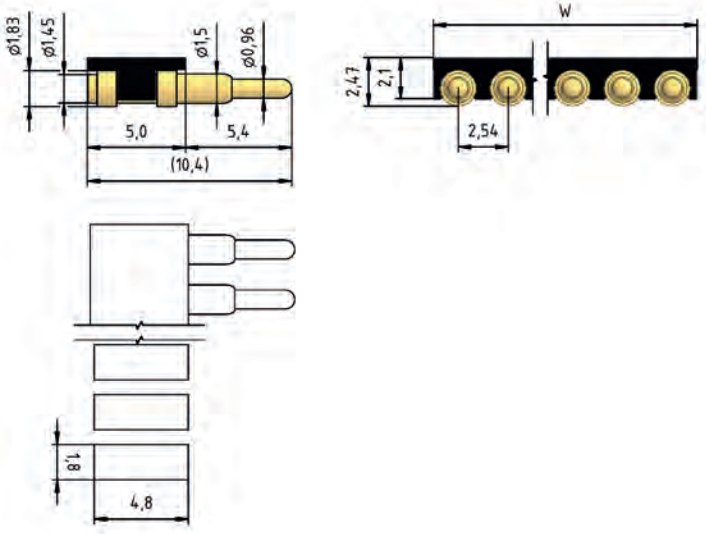

BENEFIT	
Position horizontal	
Short, compact size	
Tape on Reel - SMD	
2 to 12 poles available	
MECHANICAL DATA	
Center	2.54 mm / 100 mil
Full Travel	2.00 mm
Working Travel	1.50 mm
Pre-Loaded Spring Force	0.30 N
Spring Force at Working Travel	1.00 N
ELECTRICAL DATA	
Max. Current Rating	3.5 A
Typical Continuity Resistance	≤ 20 mOhm
MATERIALS	
Barrel	Brass, gold-plated
Spring	Spring Steel, gold-plated
Plunger	Brass, gold-plated
Test Probe Block	PA
TAPE ON REEL (EN 60286-3)	
Tape on reel width	44 mm
Spooling diameter	15“
Number of components	1600
Pitch	16 mm
OPERATING LIFE	
Cycle	50.000

ORDER DATA

Poles	Width (mm)	Article Designation	Article Number	PU
FKB 5457/1				
2	5.08	FKB 5457/1-02-104-R44	65457F202104	PCS800
3	7.62	FKB 5457/1-03-104-R44	65457F203104	PCS800
4	10.16	FKB 5457/1-04-104-R44	65457F204104	PCS800
5	12.70	FKB 5457/1-05-104-R44	65457F205104	PCS800
6	15.24	FKB 5457/1-06-104-R44	65457F206104	PCS800
7	17.78	FKB 5457/1-07-104-R44	65457F207104	PCS800
8	20.32	FKB 5457/1-08-104-R44	65457F208104	PCS800
9	22.86	FKB 5457/1-09-104-R44	65457F209104	PCS800
10	25.40	FKB 5457/1-10-104-R44	65457F210104	PCS800
11	27.94	FKB 5457/1-11-104-R44	65457F211104	PCS800
12	30.48	FKB 5457/1-12-104-R44	65457F212104	PCS800

HOW TO ORDER

FKB5457	/1	-	2	-	104	-	R44
1	2		3		4		5

1 Series 2 Number of Rows 3 Poles 4 Installation Height 5 Tape on Reel