
Receptacle, silver-plated

KS-612 400 35 M-R

Item KS-61240035M-R

GO TO PRODUCT


Partner for Future Technology





1:1



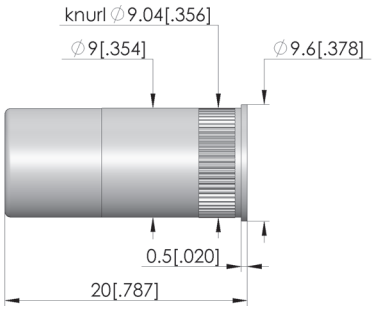

General data

Product group:	Receptacles (KS)
Series:	KS-612
Sub-series:	KS-612 M-D04 screw-in version
Type of receptacle connection:	Solder outer surface
Press ring:	No
Surface area:	Silver
Collar diameter:	9.6 mm [.377 in]
Collar height:	0.5 mm [.019 in]
Knurl:	Yes
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	9.00 - 9.02 mm [.354 - .355 in]
Mounting hole in FR4:	9.00 - 9.02 mm [.354 - .355 in]

Mechanical data

Total length:	20 mm [.787 in]
Outer diameter:	9 mm [.354 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB