

Basic Threaded Probes

F73211B064G150H

Item number 1001456

General

Design	Basic Contact Probe
Type/family	F732
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+200°C
Additional definition	H

Electrical specifications

Continuous current (A)	5.00
Typical contact resistance (mOhm)	25.00

Mechanical specifications


Preload (cN)	60.00
Spring force (cN)	150.00
Nominal travel (mm)	4.00
Maximum travel (mm)	5.00
Pointing accuracy +/- (mm)	0.08
Thread	M1,6
Tool size (mm)	1,7

Dimensions

Total length (mm)	35.70
Projection height (mm)	10.30
Tip style diameter (mm)	0.64
Barrel diameter (mm)	1.65
Collar diameter (mm)	2.30
Press ring diameter (mm)	2.30
B – spade width (mm)	1.00
C – spade length (mm)	5.00
D – plate diameter (mm)	1.00
B – plate diameter (mm)	1.00
C – pin length (mm)	5.00

Family drawing

All measurements are in mm.

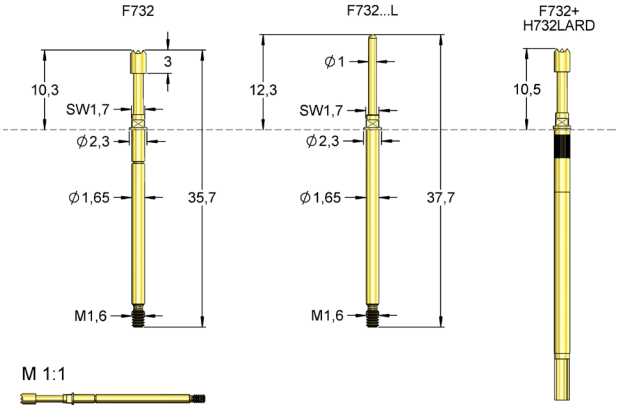

Materials & surfaces

Tip style	11
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	High-grade steel
Spring plating	Uncoated

Accessories

Tool for receptacle	FEWZ-772E0