Spring-loaded test probe


GKS-204 291 130 N 1510 M

Item GKS-204-0232

Partner for

- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.



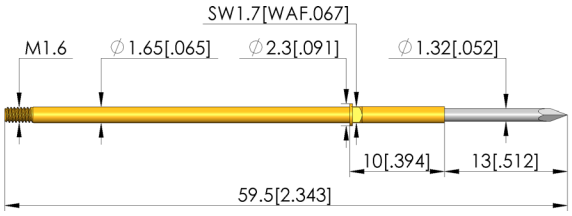

General data

Product group:	Screw-in test probe
Sub-product group:	Screw-in test probe
Series:	GKS-204 M screw-in
Grid:	2.54 mm [100 mil]
Contacting from:	Pad, via
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Screw-in torque:	3 - 5 cNm [.265 - .442 lbf·in]
Compatible receptacle(s):	KS-204 M
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a;6c

Electrical data

Current load capacity / rated current:	
Typical resistance (Ri):	

Mechanical data

Total length:	
Barrel diameter:	
Maximum stroke:	
Spring pre-load:	
Collar height:	
Spring force at working stroke:	
Recommended working stroke:	

Tip style data

Tip style:	
Tip diameter:	
Tip style surface:	
Tip style material:	

ingun.com