Spring-loaded test probe


GKS-354 102 580 U 4000


Item GKS-354-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

NEW

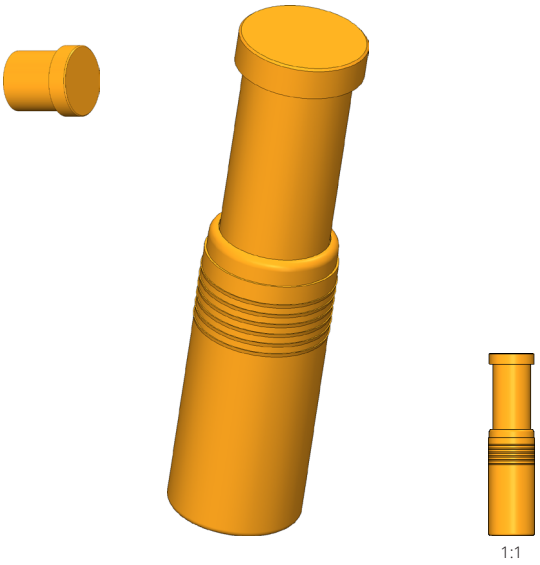

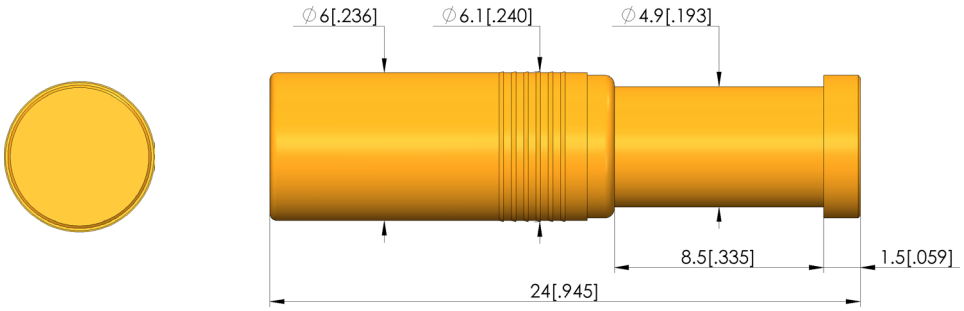

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	PCB support pins
Series:	GKS-354 special version
Grid:	6.5 mm [255 mil]
Contacting from:	Pin, posts, bead, flat contact
Magnetic:	No
Installation type:	Press-in
Quick-exchange system:	No
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	- 100 °C [- 212 °F]
Max. temperature:	+ 200 °C [+ 392 °F]
RoHS-compliant:	RoHS-3;6c

Mechanical data

Total length:	24 mm [.944 in]
Barrel diameter:	6 mm [.236 in]
Maximum stroke:	7.5 mm [.295 in]
Spring pre-load:	1.47 N [5.28 ozf]
Collar height:	00
Spring force at working stroke:	4 N [14.3 ozf]
Recommended working stroke:	6 mm [.236 in]
Mounting hole in probe plate (KTP):	6.05 - 6.07 mm [.238 - .238 in]

Tip style data

Tip style:	02 flat
Tip diameter:	5.8 mm [.228 in]
Tip style surface:	U unplated
Tip style material:	1 brass


Spring-loaded test probe

GKS-354 102 580 U 4000

Item GKS-354-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

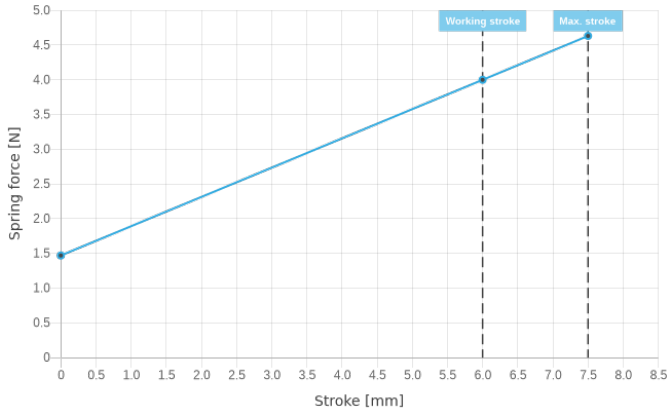

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com