Receptacle, pre-wired


KS-040 E08 V-30


Item KS-040E08V-30

GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION

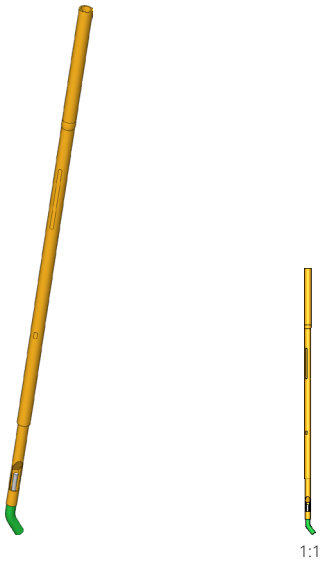

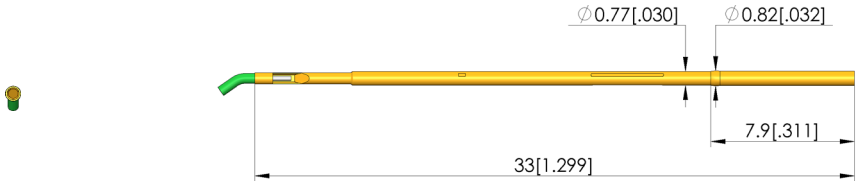

General data

Product group:	Receptacles (KS)
Series:	KS-040
Sub-series:	KS-040 press-in version
Type of receptacle connection:	Pre-wired
Press ring:	Yes
Surface area:	Gold
Collar diameter:	0.82 mm [.032 in]
Collar height:	7.9 mm [.311 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	0.79 - 0.80 mm [.031 - .031 in]
Mounting hole in FR4:	0.79 - 0.80 mm [.031 - .031 in]

Mechanical data

Total length:	33 mm [1.29 in]
Outer diameter:	0.77 mm [.030 in]

Wiring data

Wire type AWG:	30 type 2
Wire type:	Solid
Insulating material:	Polyvinylidene fluoride (kynar)
Wire outer diameter:	0.54 mm [.021 in]
Wire length:	1 m [39.3 in]
Wire diameter:	0.25 mm [.009 in]
Wire colour:	Green
Kink protection:	No

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB