
# Stroke-measuring probe

## HMS-075 305 064 A


Item HMS-075-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

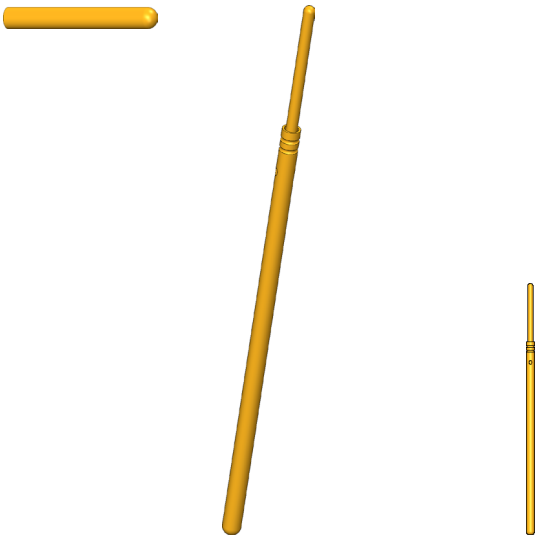

1:1

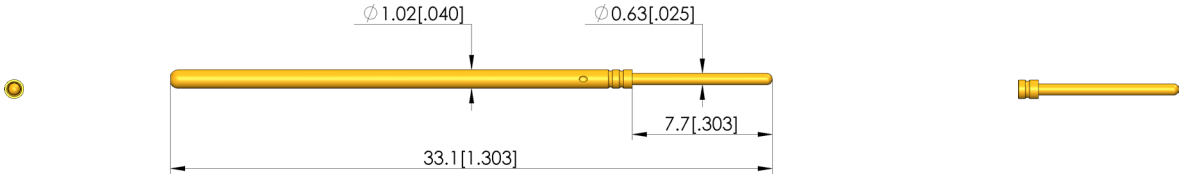


### General data

| | |
|---|---|
| Product group: | Accessories (GKS / ADA) |
| Sub-product group: | Stroke-measuring probe |
| Series: | HMS-075 |
| Grid: | 1.91 mm [75 mil] |
| Contacting from: | Pad, Female connector |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Compatible receptacle(s): | KS-075 |
| Min. temperature: | - 40 °C [- 104 °F] |
| Max. temperature: | + 80 °C [+ 176 °F] |
| RoHS-compliant: | RoHS-3;6c |

### Mechanical data

| | |
|---|---|
| Total length: | 33.1 mm [1.30 in] |
| Barrel diameter: | 1.02 mm [.040 in] |
| Maximum stroke: | 6.35 mm [.25 in] |
| Collar height: | 00 |
| Recommended working stroke: | 4.3 mm [.169 in] |

### Tip style data

| | |
|---|---|
| Tip style: | 05 bullet-nosed (full radius) |
| Tip diameter: | 0.64 mm [.025 in] |
| Tip style surface: | A gold |
| Tip style material: | 3 CuBe |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
**Test probes**

Prices and delivery times on request.
Technical changes reserved. 02/25_GB



ingun.com