# Contact terminal A

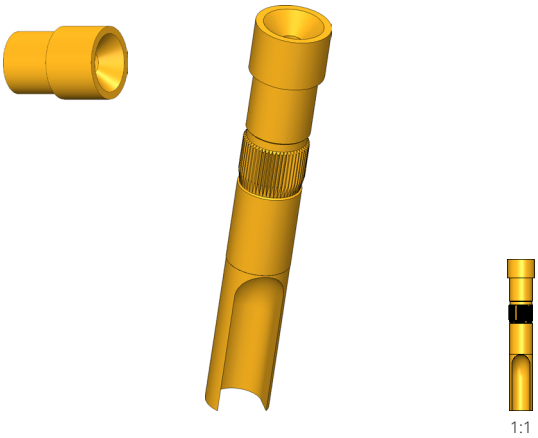
## KT-120 L3 E02-30

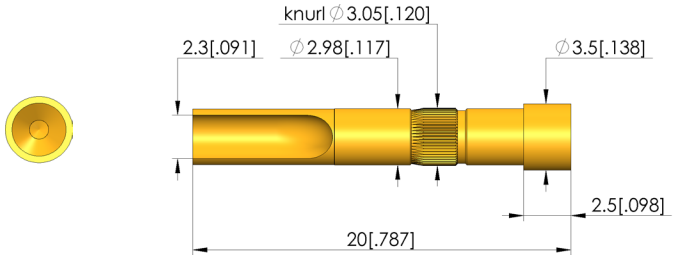
Item KT-120L3E02-30


GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION




### General data

| | |
|---|---|
| Product group: | Contact terminals (KT) |
| Series: | KT-120 |
| Sub-series: | KT-120 |
| Grid: | 4 mm [157 mil] |
| Type of contact terminal connection: | Solder connection |
| Magnetic: | Yes |
| Installation type: | Press-in |
| Quick-exchange system: | No |
| Surface area: | A gold |
| Material: | 1 brass |
| Knurl: | Yes |
| RoHS-compliant: | RoHS-3;6c |

### Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 3.00 - 3.02 mm [.118 - .118 in] |
| Mounting hole in FR4: | 3.00 - 3.02 mm [.118 - .118 in] |

### Mechanical data

| | |
|---|---|
| Collar height: | 02 |
| Total length: | 20 mm [.787 in] |
| Shaft diameter: | 2.98 mm [.117 in] |
| Latching lug: | No |

### Tip style data

| | |
|---|---|
| Tip style: | 43 inverse cone with champfered bore |
| Tip diameter: | 3.5 mm [.137 in] |
| Bore Ø in tip style: | 1 mm [.039 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
**Test probes**

Prices and delivery times on request.
Technical changes reserved. 02/25_GB



ingun.com

CONTACT TERMINALS