Receptacle A

KS-899 30 M-R


Item KS-89930M-R

GO TO PRODUCT

Partner for Future Technology

INGUN SELECTION


Note:
The receptacle contains an axial bore for leakage testing. This can be closed by soldering on a cable. The receptacle is vacuum-tight after the soldering process. Caution: If handled incorrectly, solder can reach the inner surface of the receptacle.

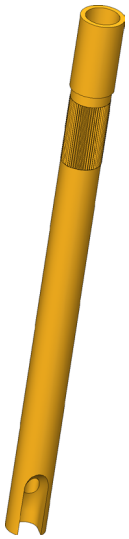



1:1



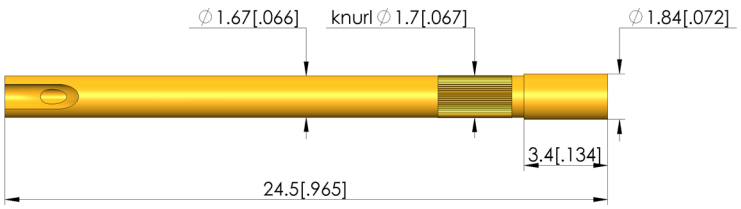

General data

Product group:	Receptacles (KS)
Series:	KS-899
Sub-series:	KS-899 M screw-in version
Type of receptacle connection:	Solder
Press ring:	No
Surface area:	Gold
Collar diameter:	1.84 mm [.072 in]
Collar height:	3.4 mm [.133 in]
Knurl:	Yes
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	1.67 - 1.68 mm [.065 - .066 in]
Mounting hole in FR4:	1.67 - 1.68 mm [.065 - .066 in]

Mechanical data

Total length:	24.5 mm [.964 in]
Outer diameter:	1.67 mm [.065 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB