
Receptacle

KS-672 D12 M14 M5 V-R-AC


Item KS-672D12M14M5V-R-AC

GO TO PRODUCT

ingun®
Partner for Future Technology

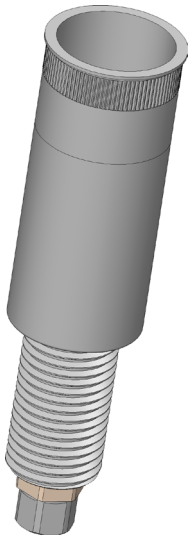



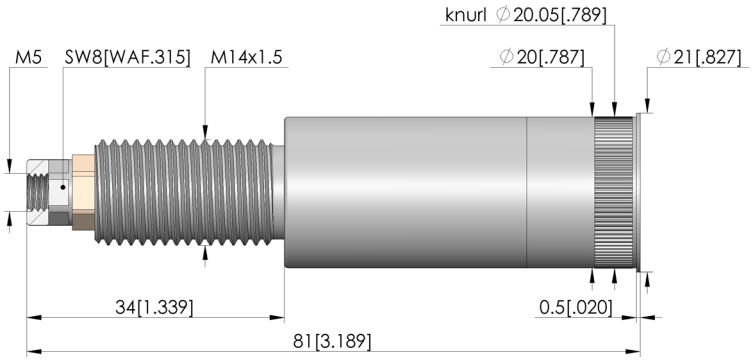

General data

Product group:	Receptacles (KS)
Series:	KS-672
Sub-series:	KS-672 M-V12 screw-in version for 12 mm VKR
Type of receptacle connection:	Thread (M)
Press ring:	No
Surface area:	Silver
Collar diameter:	21 mm [.826 in]
Collar height:	0.5 mm [.019 in]
Knurl:	Yes
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	19.00 - 19.02 mm [.748 - .748 in]
Mounting hole in FR4:	19.00 - 19.02 mm [.748 - .748 in]
Mounting hole with press ring in CEM1:	19 mm [.748 in]
Mounting hole with press ring in FR4:	19 mm [.748 in]

Mechanical data

Total length:	81 mm [3.18 in]
Outer diameter:	19 mm [.748 in]

Wiring data

Insulating material:	PEEK

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB