Receptacle A


# KS-103 30 M2.5

Item KS-10330M2.5

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION

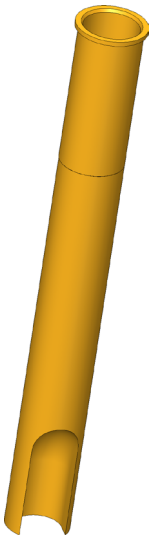



1:1



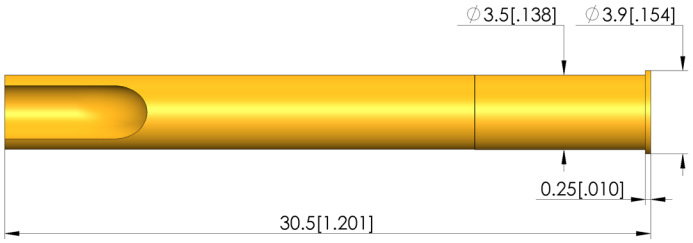


## General data

| | |
|---|---|
| Product group: | Receptacles (KS) |
| Series: | KS-103 |
| Sub-series: | KS-103 M screw-in version |
| Type of receptacle connection: | Solder |
| Press ring: | No |
| Surface area: | Gold |
| Collar diameter: | 3.9 mm [.153 in] |
| Collar height: | 0.25 mm [.009 in] |
| Knurl: | No |
| Vacuum-tight: | No |
| RoHS-compliant: | RoHS-3;6c |

## Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 3.48 - 3.49 mm [.137 - .137 in] |
| Mounting hole in FR4: | 3.48 - 3.49 mm [.137 - .137 in] |

## Mechanical data

| | |
|---|---|
| Total length: | 30.5 mm [1.20 in] |
| Outer diameter: | 3.5 mm [.137 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB