Receptacle


# KS-100 30

Item KS-10030

GO TO PRODUCT


ingun®
Partner for Future Technology

INGUN SELECTION

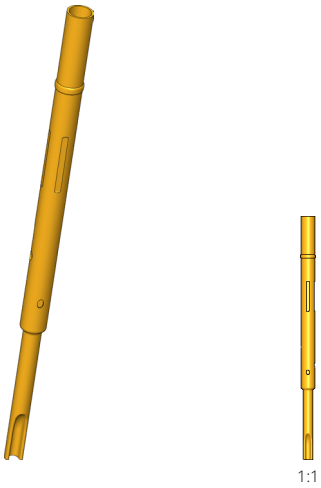

1:1



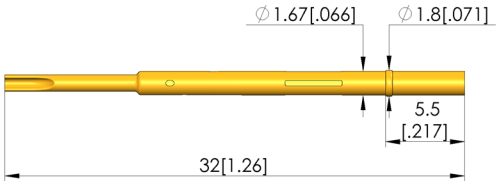


## General data

| | |
|---|---|
| Product group: | Receptacles (KS) |
| Series: | KS-100 |
| Sub-series: | KS-100 press-in version |
| Type of receptacle connection: | Solder |
| Press ring: | No |
| Surface area: | Gold |
| Collar diameter: | 1.8 mm [.070 in] |
| Collar height: | 5.5 mm [.216 in] |
| Knurl: | No |
| Vacuum-tight: | No |
| RoHS-compliant: | RoHS-3 |

## Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 1.68 - 1.69 mm [.066 - .066 in] |
| Mounting hole in FR4: | 1.69 - 1.70 mm [.066 - .066 in] |

## Mechanical data

| | |
|---|---|
| Total length: | 32 mm [1.25 in] |
| Outer diameter: | 1.67 mm [.065 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB