
# Spring-loaded test probe


## GKS-913 306 230 R 1502 1

Item GKS-913-0038

GO TO PRODUCT

ingun®
Partner for Future Technology

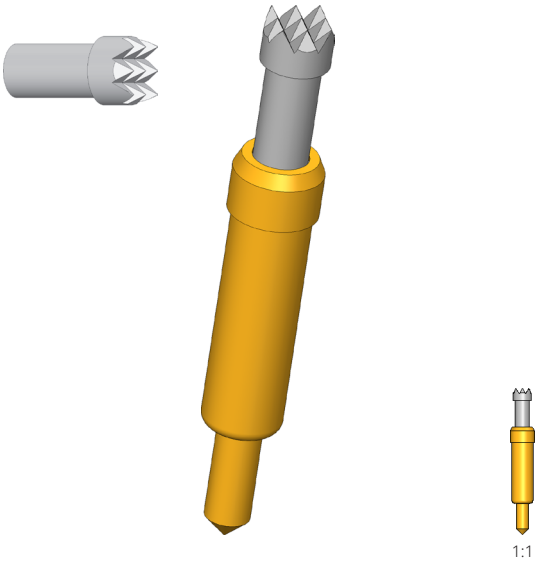

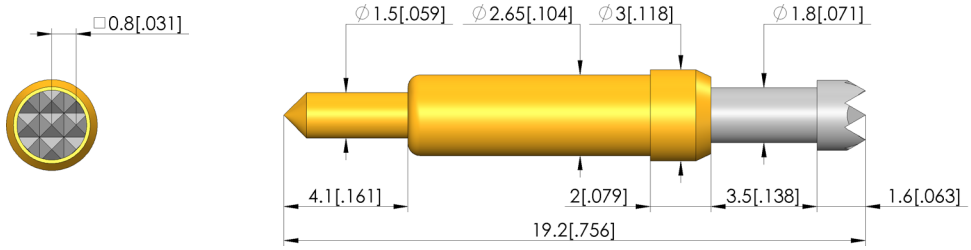
### General data

| | |
|---|---|
| Product group: | ICT / FCT (in-circuit test and function test |
| Sub-product group: | Metric standard |
| Series: | GKS-913 1 |
| Grid: | 4 mm [157 mil] |
| Contacting from: | Pin, Post, Flat contact |
| Magnetic: | Yes |
| Installation type: | Solderable |
| Quick-exchange system: | No |
| Type of test probe connection: | Solder connection |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Min. temperature: | - 40 °C [- 104 °F] |
| Max. temperature: | + 80 °C [+ 176 °F] |
| RoHS-compliant: | RoHS-3;6c |

### Electrical data

| | |
|---|---|
| Current load capacity / rated current: | 8 A |
| Typical resistance (Ri): | <20 mOhm |

### Mechanical data

| | |
|---|---|
| Total length: | 19.2 mm [.755 in] |
| Barrel diameter: | 2.65 mm [.104 in] |
| Maximum stroke: | 3.5 mm [.137 in] |
| Spring pre-load: | 0.45 N [1.61 ozf] |
| Collar height: | 02 |
| Spring force at working stroke: | 1.5 N [5.39 ozf] |
| Recommended working stroke: | 2.8 mm [.110 in] |

### Tip style data

| | |
|---|---|
| Tip style: | 06 serrated |
| Tip diameter: | 2.3 mm [.090 in] |
| Tip style surface: | R rhodium |
| Tip style material: | 3 CuBe |


# Spring-loaded test probe

## GKS-913 306 230 R 1502 1

Item GKS-913-0038

GO TO PRODUCT

ingun®
Partner for Future Technology

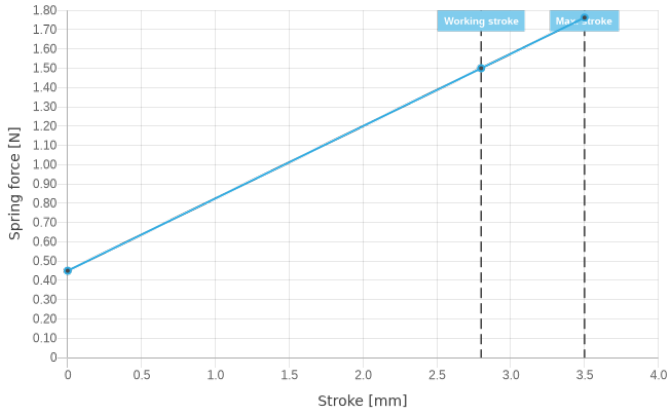


**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB



Learn more about
**ICT/FCT Test probes**

ingun.com

ICT/FCT TEST PROBES