KS with a square post and press ring


KS-100 47 G

Item KS-10047G

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION





1:1



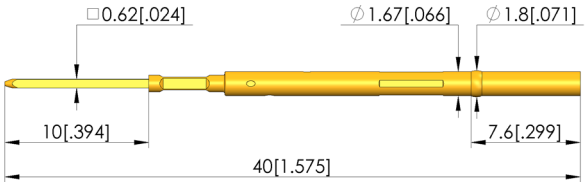

General data

Product group:	Receptacles (KS)
Series:	KS-100
Sub-series:	KS-100 press-in version
Type of receptacle connection:	Wire-wrap
Press ring:	Yes
Surface area:	Gold
Collar diameter:	1.85 mm [.072 in]
Collar height:	7.6 mm [.299 in]
Wire-wrap post length:	10 mm [.393 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	1.68 - 1.69 mm [.066 - .066 in]
Mounting hole in FR4:	1.69 - 1.70 mm [.066 - .066 in]
Mounting hole with press ring in CEM1:	1.71 - 1.73 mm [.067 - .068 in]
Mounting hole with press ring in FR4:	1.72 - 1.74 mm [.067 - .068 in]

Mechanical data

Total length:	40 mm [1.57 in]
Outer diameter:	1.67 mm [.065 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB