Spring-loaded test probe

GKS-502 233 250 R 1502 L

Item GKS-502-0031

GO TO PRODUCT

ingun®
Partner for Future Technology

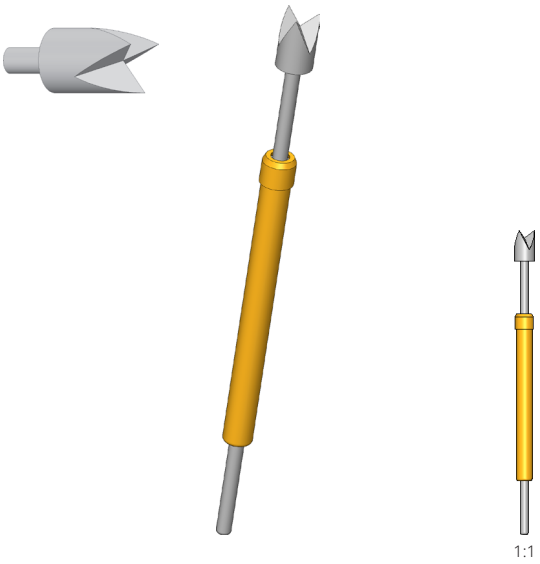

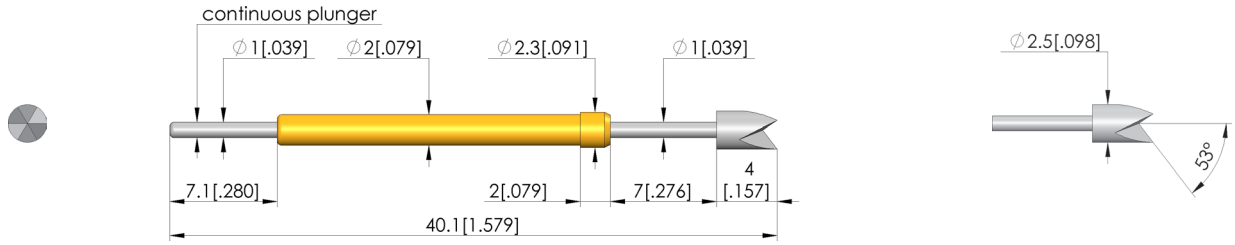

General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Metric standard
Series:	GKS-502 L
Grid:	3 mm [118 mil]
Contacting from:	Pad, pin
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	No
Type of test probe connection:	Plug
Adjustable installation height:	No
Non-rotating:	No
Continuous plunger:	ø1,0 x 7,0
Compatible connector(s):	SE-502
Compatible receptacle(s):	KS-502 23
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a;6c

Electrical data

Current load capacity / rated current:	5 A
Current rating, connection on plunger:	12 A
Typical resistance (Ri):	<30 mOhm
Typical resistance (Ri), connection on plunger:	<10 mOhm

Mechanical data

Total length:	40.1 mm [1.57 in]
Barrel diameter:	2 mm [.078 in]
Maximum stroke:	7 mm [.275 in]
Spring pre-load:	0.32 N [1.15 ozf]
Collar height:	02
Spring force at working stroke:	1.5 N [5.39 ozf]
Recommended working stroke:	5.6 mm [.220 in]

Tip style data

Tip style:	33 3-point crown, self-cleaning
Tip diameter:	2.5 mm [.098 in]
Tip style surface:	R rhodium
Tip style material:	2 steel

ICT/FCT TEST PROBES

Spring-loaded test probe

GKS-502 233 250 R 1502 L

Item GKS-502-0031

GO TO PRODUCT

ingun®
Partner for Future Technology

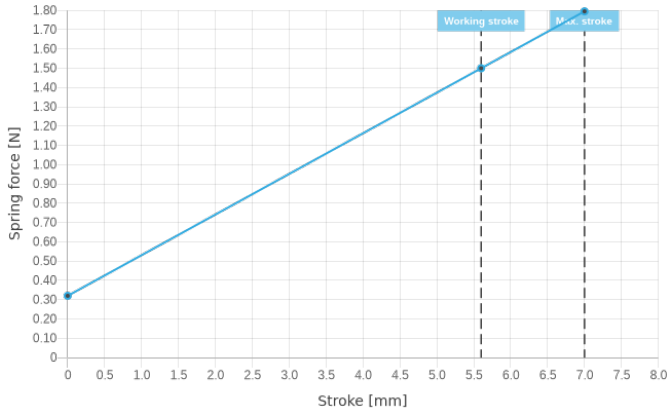

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
ICT/FCT Test probes

ICT/FCT TEST PROBES

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com