Spring-loaded test probe


GKS-414 202 500 A 1502

Item GKS-414-0007


GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION

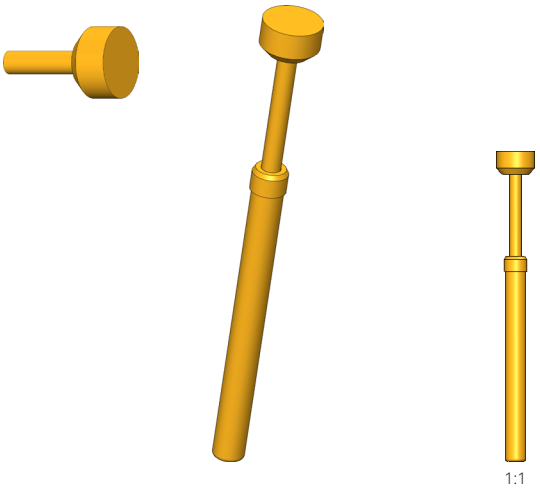

1:1

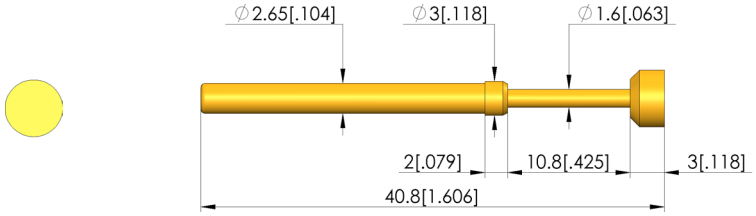

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	ESD discharge
Series:	GKS-414
Grid:	5.5 mm [216 mil]
Contacting from:	Pin, posts, bead, flat contact
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-113, KS-113 23
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a;6c

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	<30 mOhm

Mechanical data

Total length:	40.8 mm [1.60 in]
Barrel diameter:	2.65 mm [.104 in]
Maximum stroke:	10.8 mm [.425 in]
Spring pre-load:	0.26 N [.935 ozf]
Collar height:	02
Spring force at working stroke:	1.5 N [5.39 ozf]
Recommended working stroke:	9.6 mm [.377 in]

Tip style data

Tip style:	02 flat
Tip diameter:	5 mm [.196 in]
Tip style surface:	A gold
Tip style material:	2 steel


Spring-loaded test probe

GKS-414 202 500 A 1502

Item GKS-414-0007

GO TO PRODUCT

ingun®
Partner for Future Technology

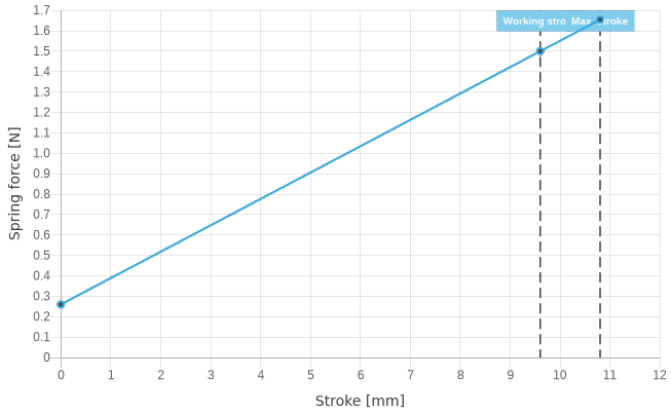

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 01/25_GB

ingun.com