
# KS with solder cup, inst. height 10.5mm

## KS-075 30 E03


GO TO PRODUCT

ingun®
Partner for Future Technology

**INGUN SELECTION**

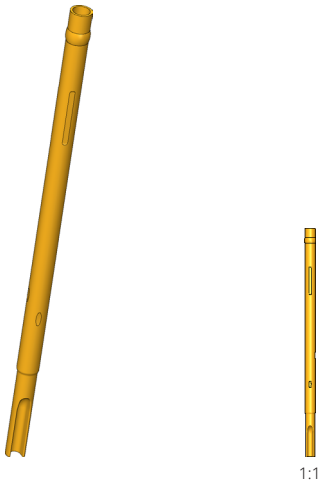

1:1

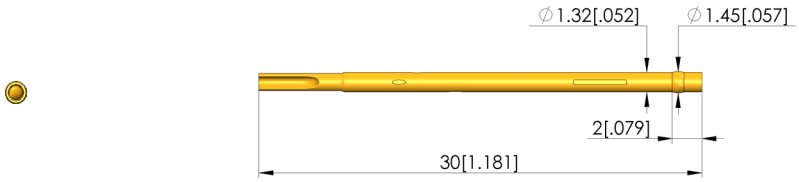


### General data

| | |
|---|---|
| Product group: | Receptacles (KS) |
| Series: | KS-075 |
| Sub-series: | KS-075 press-in version |
| Type of receptacle connection: | Solder |
| Press ring: | Yes |
| Surface area: | Gold |
| Collar diameter: | 1.47 mm [.057 in] |
| Collar height: | 2 mm [.078 in] |
| Knurl: | No |
| Vacuum-tight: | No |
| RoHS-compliant: | RoHS-3 |

### Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 1.30 - 1.32 mm [.051 - .051 in] |
| Mounting hole in FR4: | 1.31 - 1.33 mm [.051 - .052 in] |
| Mounting hole with press ring in CEM1: | 1.39 - 1.40 mm [.054 - .055 in] |
| Mounting hole with press ring in FR4: | 1.39 - 1.40 mm [.054 - .055 in] |

### Mechanical data

| | |
|---|---|
| Total length: | 30 mm [1.18 in] |
| Outer diameter: | 1.32 mm [.051 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB