Receptacle


KS-112 47 G8

Item KS-11247G8

GO TO PRODUCT

Partner for Future Technology


INGUN SELECTION





1:1



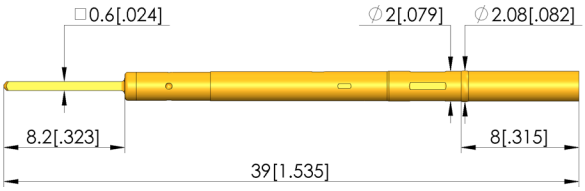

General data

Product group:	Receptacles (KS)
Series:	KS-112
Sub-series:	KS-112 press-in version
Type of receptacle connection:	Wire-wrap
Press ring:	Yes
Surface area:	Gold
Collar diameter:	2.08 mm [.081 in]
Collar height:	8 mm [.314 in]
Wire-wrap post length:	8.2 mm [.322 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	1.98 - 2.00 mm [.077 - .078 in]
Mounting hole in FR4:	1.99 - 2.01 mm [.078 - .079 in]
Mounting hole with press ring in CEM1:	2.03 - 2.05 mm [.079 - .080 in]
Mounting hole with press ring in FR4:	2.03 - 2.05 mm [.079 - .080 in]

Mechanical data

Total length:	39 mm [1.53 in]
Outer diameter:	2 mm [.078 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB