Contact terminal A

KT-S-031 57 27


Item KT-S031-0001

GO TO PRODUCT


Partner for Future Technology


- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

NEW

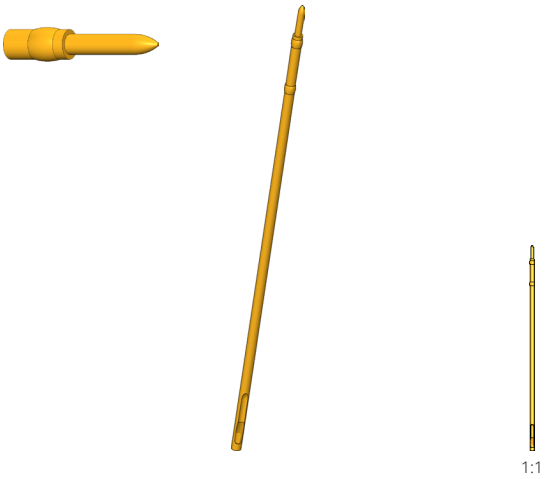

1:1

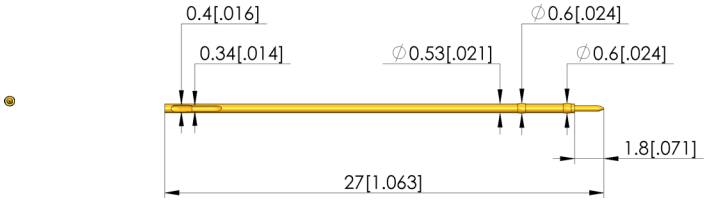



General data

Product group:	Contact terminals (KT)
Series:	KT-S031
Sub-series:	KT-S031 standard
Grid:	1 mm [40 mil]
Type of contact terminal connection:	Wire-grip
Magnetic:	Yes
Installation type:	Press-in
Quick-exchange system:	No
Surface area:	A gold
Material:	3 CuBe
Knurl:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	0.55 - 0.57 mm [.021 - .022 in]
Mounting hole in FR4:	0.55 - 0.57 mm [.021 - .022 in]

Mechanical data

Total length:	27 mm [1.06 in]
Shaft diameter:	0.53 mm [.020 in]
Latching lug:	No

Tip style data

Tip diameter:	0.36 mm [.014 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB