
Test probe


GKS-925 TJ A 1000-S

Item GKS-925TJA1000-S

GO TO PRODUCT

ingun®
Partner for Future Technology

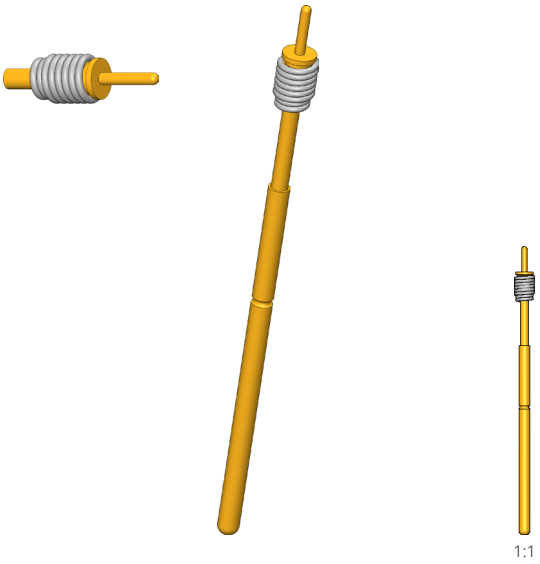

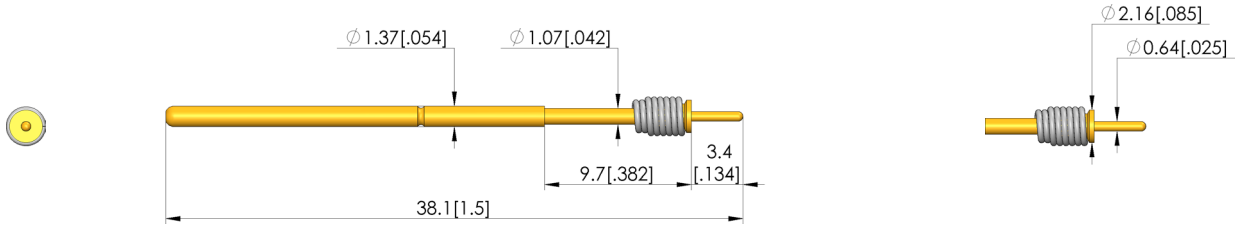

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	TestJet test probe
Series:	GKS-925 TJA-S
Grid:	2.54 mm [100 mil]
Contacting from:	Pad, Female connector
DUT / contact:	Testjet
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	<20 mOhm

Mechanical data

Total length:	38.1 mm [1.5 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	5.5 mm [.216 in]
Spring pre-load:	0.29 N [1.04 ozf]
Collar height:	00
Spring force at working stroke:	1 N [3.59 ozf]
Recommended working stroke:	5 mm [.196 in]

Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	0.64 mm [.025 in]
Tip style surface:	A gold
Tip style material:	1 brass
Step probe tip height:	3.4 mm [.133 in]
Disk diameter:	2.15 mm [.084 in]


Test probe

GKS-925 TJ A 1000-S

Item GKS-925TJA1000-S

GO TO PRODUCT

ingun®
Partner for Future Technology

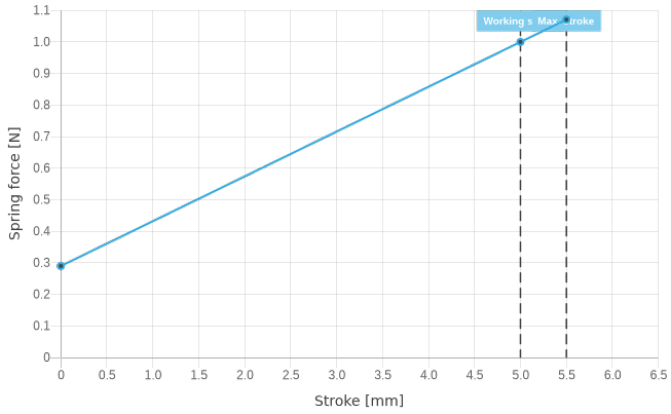

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com