
Stroke-measuring probe


HMS-422 305 130 A

Item HMS-422-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

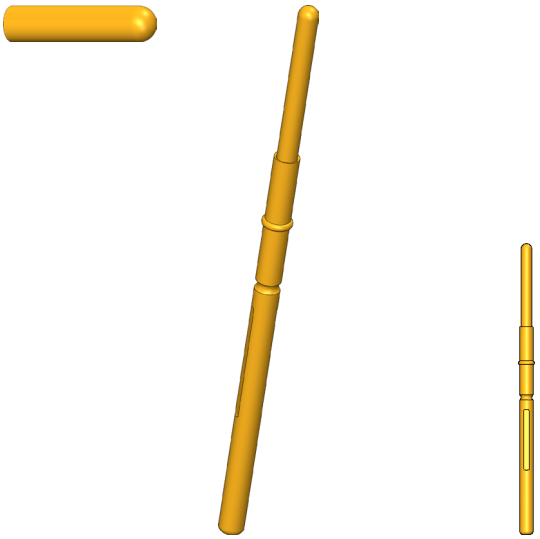

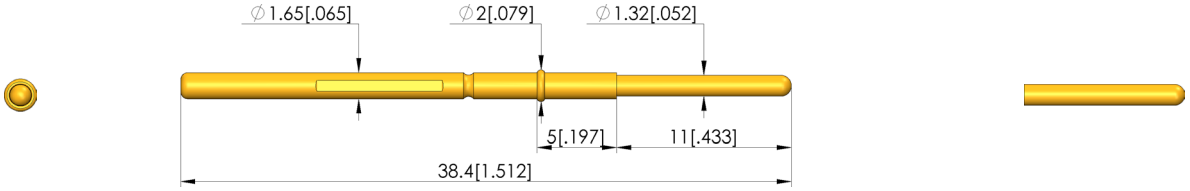

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	Stroke-measuring probe
Series:	HMS-422
Grid:	2.54 mm [100 mil]
Contacting from:	Pad, Female connector
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-112
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

Mechanical data

Total length:	38.4 mm [1.51 in]
Barrel diameter:	1.65 mm [.064 in]
Maximum stroke:	8 mm [.314 in]
Collar height:	05
Recommended working stroke:	6.4 mm [.251 in]

Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	1.3 mm [.051 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 01/25_GB

ingun.com