# Switching probe (NO)

## SKS-465 306 230 A 3502 MF

Item SKS-465-0203


GO TO PRODUCT

Partner for Future Technology

- For a wide range of applications: performs components detection check, is a switch for detecting closed/open states, and a signal transmitter for process control
- Various collar heights are available on the receptacles to adjust the installation height
- The installation height can be varied, and the position of the switching point can be precisely adjusted via the probe's thread. The SKS is secured in the correct position by crimp point in the KS.
- The electrical connection is ensured by installation using a receptacle, optionally available with a quick-change system for easy exchange during maintenance

**INGUN SELECTION**

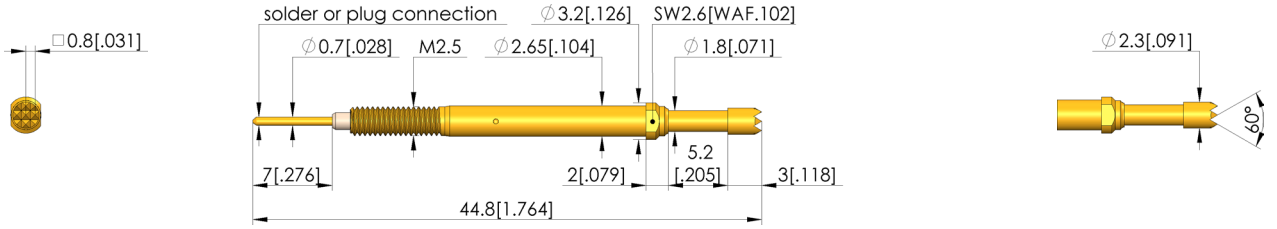


### General data

| | |
|---|---|
| Product group: | Switching probes |
| Sub-product group: | SKS (screwed-in) |
| Series: | SKS-465 MF quick-exchange/ plug system, screw-in |
| Grid: | 3.5 mm [137 mil] |
| Contacting from: | Pin, Post, Flat contact |
| Magnetic: | Yes |
| Installation type: | Screw-in |
| Quick-exchange system: | Yes |
| Type of test probe connection: | Plug |
| Adjustable installation height: | Yes |
| Non-rotating: | No |
| Screw-in torque: | 3 - 5 cNm [.265 - .442 lbf·in] |
| Compatible connector(s): | SE-215 |
| Compatible receptacle(s): | KS-465 M, KS-465 M-F |
| Min. temperature: | - 40 °C [- 104 °F] |
| Max. temperature: | + 80 °C [+ 176 °F] |
| RoHS-compliant: | RoHS-3;6c |

### Electrical data

| | |
|---|---|
| Current load capacity / rated current: | 3 A |

### Mechanical data

| | |
|---|---|
| Total length: | 44.8 mm [1.76 in] |
| Barrel diameter: | 2.65 mm [.104 in] |
| Maximum stroke: | 5.2 mm [.204 in] |
| Spring pre-load: | 1.02 N [3.66 ozf] |
| Collar height: | 02 |
| Switch path: | 1.7 mm [.066 in] |
| Switching point: | 8.5 mm [.334 in] |
| Spring force at switching point: | 1.8 N [6.47 ozf] |

### Tip style data

| | |
|---|---|
| Tip style: | 06 serrated |
| Tip diameter: | 2.3 mm [.090 in] |
| Tip style surface: | A gold |
| Tip style material: | 3 CuBe |


**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com


Learn more about
**Test probes**


Prices and delivery times on request.
Technical changes reserved. 02/25_GB




ingun.com