Coaxial cable, pre-wired


SE-RG59-75TNCMG070


Item SE-RG59-0002

GO TO PRODUCT

ingun®
Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

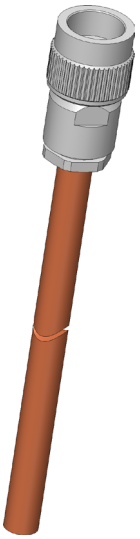

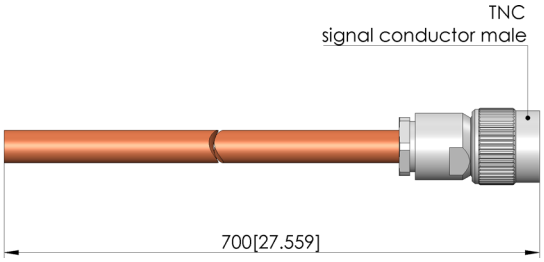

General data

Product group:	Assemblies
Series:	SE-RG59
Sub-series:	SE-RG59 plug
Min. temperature:	- 25 °C [- 77 °F]
Max. temperature:	+ 85 °C [+ 185 °F]
RoHS-compliant:	RoHS-3

Cable data

Cable length:	70 cm [27.5 in]
Cable type:	RG_59_B/U
Kink protection cable:	Shrink-on sleeve, black, 20 mm
Attenuation Fmax:	0.26 dB

Connector data

Interface 1:	TNC
Interface gender 1:	M signal conductor male / plug
Version 1:	Straight
Interface 2:	Open cable end
Moment interface 1:	65 cNm [5.75 lbf·in]

Electrical data

Maximum frequency:	1 GHz
Impedance:	75 Ohm
Cable shielding:	Simple
Maximum performance:	101 W
Performance coefficient:	101 RG59
Dielectric strength:	1.5 kV
Attenuation coefficient a:	0,31730 RG59
Attenuation coefficient b:	0,04990 RG59

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

PLUG AND CABLE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com