Receptacle


KS-005 30 G

Item KS-00530G

GO TO PRODUCT

Partner for Future Technology


INGUN SELECTION

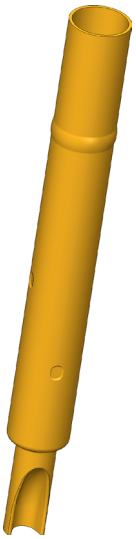



1:1



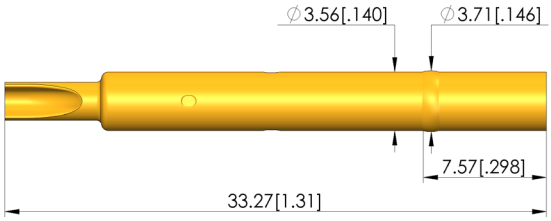

General data

Product group:	Receptacles (KS)
Series:	KS-005
Sub-series:	KS-005 press-in version
Type of receptacle connection:	Solder
Press ring:	Yes
Surface area:	Gold
Collar diameter:	3.66 mm [.144 in]
Collar height:	7.6 mm [.299 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	3.53 - 3.54 mm [.138 - .139 in]
Mounting hole in FR4:	3.53 - 3.54 mm [.138 - .139 in]
Mounting hole with press ring in CEM1:	3.58 - 3.63 mm [.140 - .142 in]
Mounting hole with press ring in FR4:	3.58 - 3.63 mm [.140 - .142 in]

Mechanical data

Total length:	33.3 mm [1.31 in]
Outer diameter:	3.56 mm [.140 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB