Spring-loaded test probe

GKS-051 358 300 A 2000


Item GKS-051-0209

GO TO PRODUCT

ingun®
Partner for Future Technology

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair



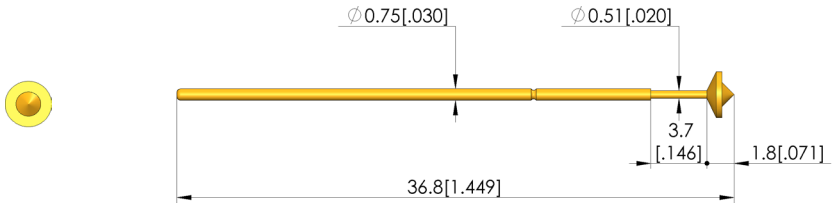

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	RF inner conductor
Series:	GKS-051
Grid:	1.27 mm [50 mil]
Contacting from:	Pad, Via, Female connector
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	<20 mOhm

Mechanical data

Total length:	36.8 mm [1.44 in]
Barrel diameter:	0.75 mm [.029 in]
Maximum stroke:	3.7 mm [.145 in]
Spring pre-load:	1.07 N [3.84 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	2 mm [.078 in]

Tip style data

Tip style:	58 90° conical, self-cleaning, special length
Tip diameter:	3 mm [.118 in]
Tip style surface:	A gold
Tip style material:	3 CuBe
Step probe tip height:	0.8 mm [.031 in]


Spring-loaded test probe

GKS-051 358 300 A 2000

Item GKS-051-0209

GO TO PRODUCT

ingun®
Partner for Future Technology

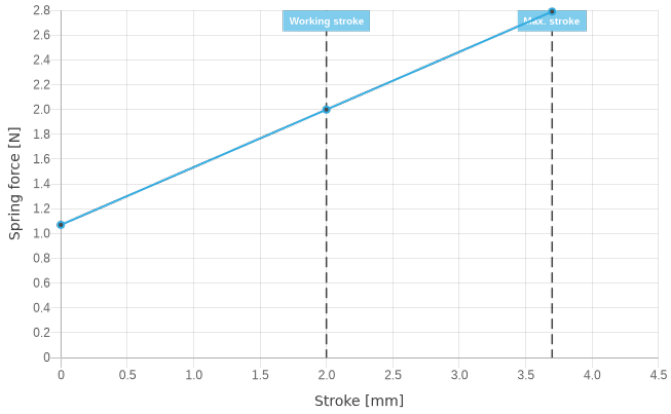

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 01/25_GB

ingun.com