Coaxial cable, pre-wired


SE-RG179-75MCXMG070

Item SE-RG179-0001

GO TO PRODUCT


ingun®
Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

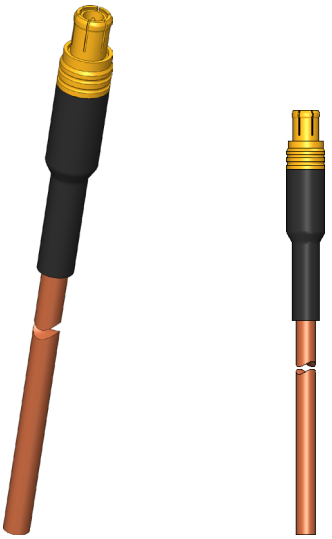

1:1



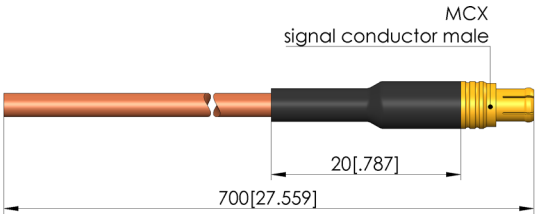

General data

Product group:	Assemblies
Series:	SE-RG179
Sub-series:	SE-RG179 plug
Min. temperature:	- 65 °C [- 149 °F]
Max. temperature:	+ 165 °C [+ 329 °F]
RoHS-compliant:	RoHS-3

Cable data

Cable length:	70 cm [27.5 in]
Cable type:	RG_179_B/U
Kink protection cable:	Shrink-on sleeve, black, 20 mm
Attenuation Fmax:	0.58 dB

Connector data

Interface 1:	MCX
Interface gender 1:	M signal conductor male / plug
Version 1:	Straight
Interface 2:	Open cable end

Electrical data

Maximum frequency:	1 GHz
Impedance:	75 Ohm
Cable shielding:	Simple
Maximum performance:	115 W
Performance coefficient:	115 RG179
Dielectric strength:	0.5 kV
Attenuation coefficient a:	0,73000 RG179
Attenuation coefficient b:	0,10140 RG179

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

PLUG AND CABLE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com