Contact clamp, dipole

VK-541 T0510 1410 M 3S05 A


Item VK-541-0001


GO TO PRODUCT


ingun®
Partner for Future Technology

INGUN SELECTION




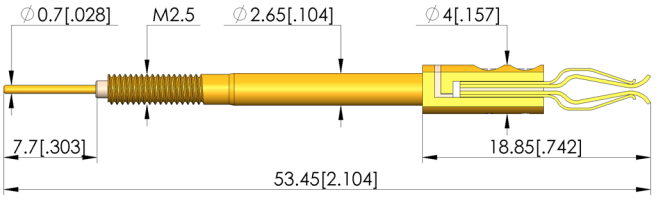





Example of contact at working stroke

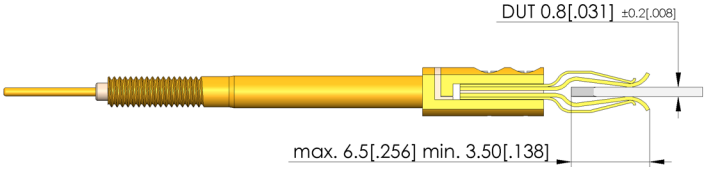

HIGH-CURRENT TEST PROBE

Contact clamp, dipole

VK-541 T0510 1410 M 3S05 A

Item VK-541-0001

GO TO PRODUCT

Partner for Future Technology

General data

Product group:	High-current test probe
Sub-product group:	Dipole HSS / four-pole clamp
Series:	VK-541 M screw-in
Grid:	4 mm [157 mil]
Contacting from:	Flat contact
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	Yes
Type of test probe connection:	Plug
Adjustable installation height:	Yes
Non-rotating:	Yes
Screw-in torque:	3 - 5 cNm [.265 - .442 lbf·in]
Compatible connector(s):	SE-215
Compatible receptacle(s):	KS-465 M, KS-465 M-F
Min. temperature:	- 100 °C [- 212 °F]
Max. temperature:	+ 200 °C [+ 392 °F]
RoHS-compliant:	RoHS-3;6c

Electrical data

Current load capacity / rated current:	10 A
Typical resistance (Ri):	<5 mOhm


Mechanical data

Total length:	53.5 mm [2.10 in]
Barrel diameter:	2.65 mm [.104 in]
Collar height:	10


Tip style data

Tip style:	00-1 open, slotted
Tip style surface:	A gold
Tip style material:	3 CuBe

Current Derating

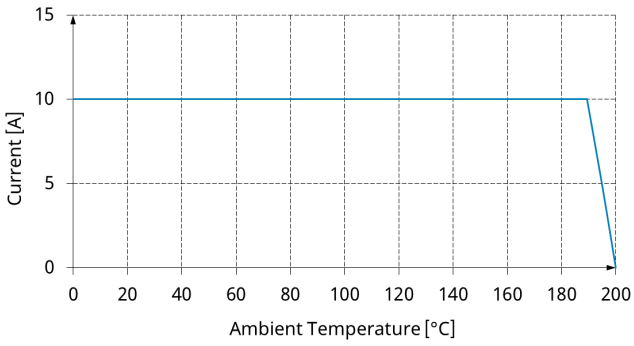

Current Rating

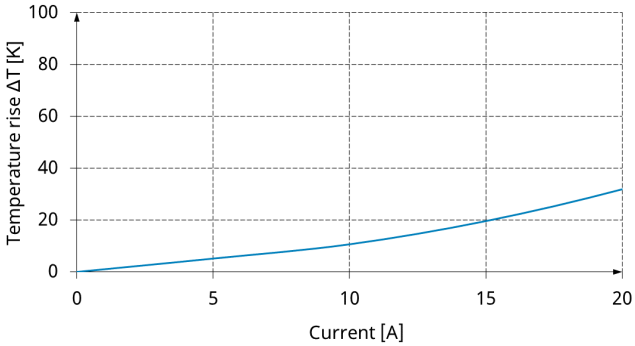

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
High-current test probe

HIGH-CURRENT TEST PROBE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com