

Basic Contact Probes

F78633S130L300

Item number 1003047

General

Design	Basic Contact Probe
Type/family	F786
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current (A)	5.00
Typical contact resistance (mOhm)	25.00

Mechanical specifications


Preload (cN)	60.00
Spring force (cN)	300.00
Nominal travel (mm)	6.40
Maximum travel (mm)	8.00
Pointing accuracy +/- (mm)	0.10

Dimensions

Total length (mm)	38.00
Projection height (mm)	16.00
Tip style diameter (mm)	1.30
Barrel diameter (mm)	1.66
Collar diameter (mm)	2.04
Press ring diameter (mm)	2.04

Family drawing

All measurements are in mm.

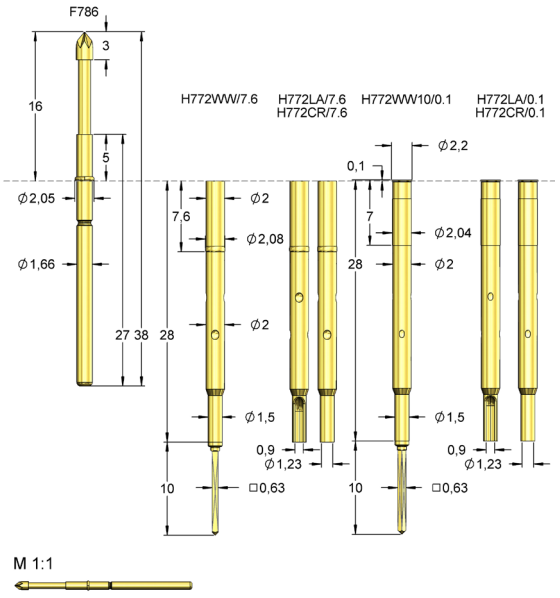

Materials & surfaces

Tip style	33
Tip style material	Steel
Tip style plating	Longtime Gold
Plunger material	Steel
Plunger plating	Longtime Gold
Barrel material	Nickel silver
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver