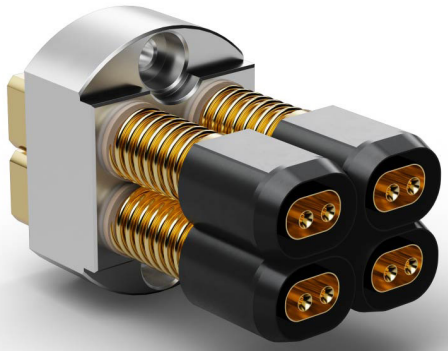


Radio Frequency Probes

HF77-0003BG04-1WP

Item number 1089897

General

Design	Coaxial Probe
Type/family	HF77
Pitch (mm/mil)	12,0 / 472
Temperature [C°]	-45°C...+100°C
Additional definition	WP

Electrical specifications

Continuous current (A)	1.00
Impedance (ohm)	100.00
Frequency (GHz)	14.00
Continuous current 2 (A)	1.00

Inner contact specifications

Nominal travel 2 (mm)	0.90
Maximum travel 2 (mm)	1.20
Preload 2 (cN)	130.00
Spring force 2 (cN)	195.00

Mechanical specifications

Preload (cN)	470.00
Spring force (cN)	630.00
Nominal travel (mm)	2.50
Maximum travel (mm)	3.50
DUT	H-MTD Male 4 Pos

Dimensions

Total length (mm)	31.20
Projection height (mm)	21.45
Tip style diameter (mm)	11.70
Barrel diameter (mm)	18.00
Tip style diameter 2 (mm)	1.30

Materials & surfaces

Tip style	00
Tip style 2	50
Tip style material	Plastic
Tip style plating	Uncoated
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	High-grade steel
Spring plating	Gold
Plunger material 2	Beryllium cooper
Plunger plating 2	Gold
Spring material 2	Spring steel
Spring plating 2	Gold