Contact terminal


KT-158 06

Item 21814


GO TO PRODUCT


ingun®
Partner for Future Technology

INGUN SELECTION

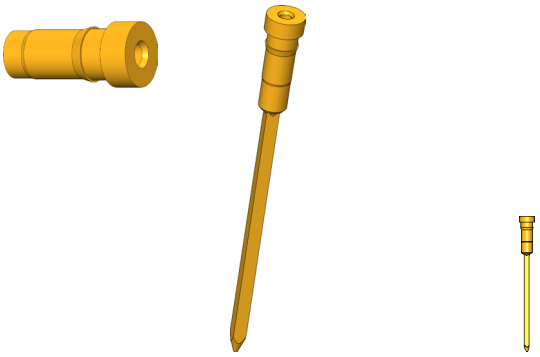

1:1

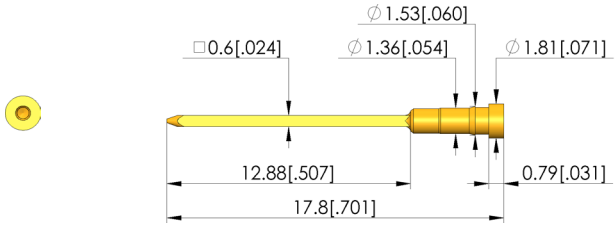



General data

Product group:	Contact terminals (KT)
Series:	KT-158
Sub-series:	KT-158
Grid:	2.54 mm [100 mil]
Type of contact terminal connection:	Wire-wrap
Magnetic:	Yes
Installation type:	Press-in
Quick-exchange system:	No
Surface area:	A gold
Material:	1 brass
Knurl:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	1.44 - 1.46 mm [.056 - .057 in]
Mounting hole in FR4:	1.44 - 1.46 mm [.056 - .057 in]

Mechanical data

Collar height:	01
Total length:	17.8 mm [.700 in]
Shaft diameter:	1.35 mm [.053 in]
Latching lug:	Yes

Tip style data

Tip style:	43 inverse cone with champfered bore
Tip diameter:	1.8 mm [.070 in]
Bore Ø in tip style:	0.6 mm [.023 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

CONTACT TERMINALS

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com