
Receptacle, pre-wired

KS-050 35 M-V-30


Item KS-05035M-V-30

GO TO PRODUCT

ingun®
Partner for Future Technology

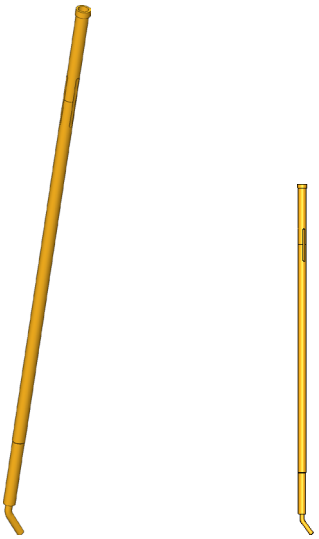

1:1

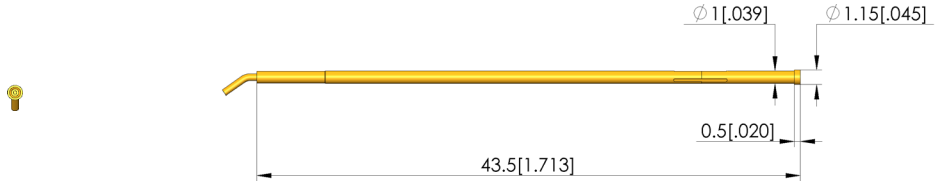

General data

Product group:	Receptacles (KS)
Series:	KS-050
Sub-series:	KS-050 M screw-in version
Type of receptacle connection:	Pre-wired
Press ring:	No
Surface area:	Gold
Collar diameter:	1.15 mm [.045 in]
Collar height:	0.5 mm [.019 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	1.00 - 1.02 mm [.039 - .040 in]
Mounting hole in FR4:	1.01 - 1.03 mm [.039 - .040 in]

Mechanical data

Total length:	43.5 mm [1.71 in]
Outer diameter:	1 mm [.039 in]

Wiring data

Wire type AWG:	30 type 2
Wire type:	Solid
Insulating material:	Tefzel
Wire outer diameter:	0.5 mm [.019 in]
Wire length:	1 m [39.3 in]
Wire diameter:	0.25 mm [.009 in]
Wire colour:	Green
Kink protection:	No

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB