
Attenuator

HFS-ADA-MCX-M-MCX-F-03DB


Item HFS-ADA-0001


GO TO PRODUCT


ingun®
Partner for Future Technology

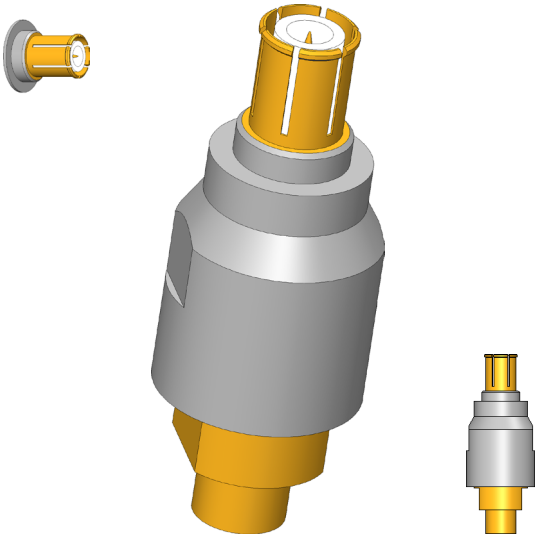

1:1



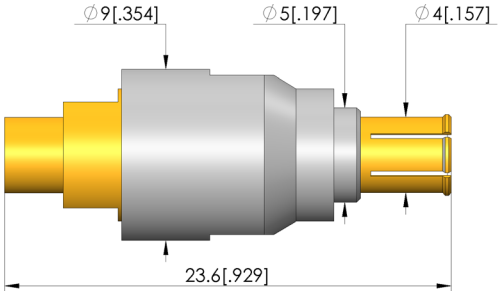



General data

Product group:	Attenuator (HFS-ADA)
Series:	RF ADA fixture
Sub-series:	RF ADA fixture DB inline attenuator
Min. temperature:	- 55 °C [- 131 °F]
Max. temperature:	+ 125 °C [+ 257 °F]
RoHS-compliant:	-

Cable data

Attenuation Fmax:	3 dB

Connector data

Interface 1:	MCX
Interface gender 1:	M signal conductor male / plug
Version 1:	Straight
Interface 2:	MCX
Interface gender 2:	F signal conductor female / socket
Version 2:	Straight

Electrical data

Maximum frequency:	6 GHz
Impedance:	50 Ohm
Maximum performance:	2 W

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

PLUG AND CABLE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com