Coaxial cable, pre-wired

SE-EF316D-50MCXMG080SMAMG


Item SE-EF316D-0016

GO TO PRODUCT

ingun®
Partner for Future Technology


- Plug or cable assemblies for RF test probes (HFS)

INGUN SELECTION

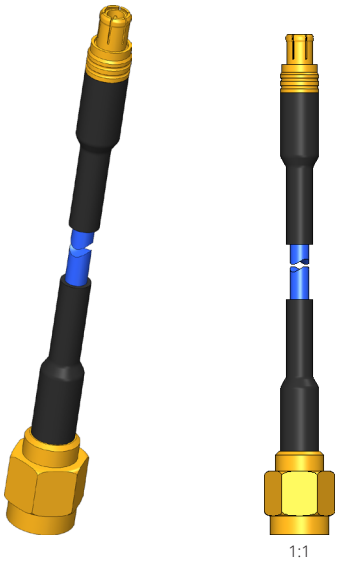

1:1



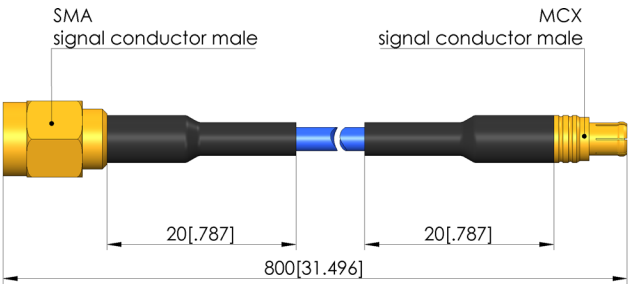

PLUG AND CABLE

Coaxial cable, pre-wired

SE-EF316D-50MCXMG080SMAMG

Item SE-EF316D-0016

GO TO PRODUCT

Partner for Future Technology

General data

Product group:	Assemblies
Series:	SE-EF316D
Sub-series:	SE-EF316D plug
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 105 °C [+ 221 °F]
RoHS-compliant:	RoHS-3

Cable data

Cable length:	80 cm [31.4 in]
Cable type:	ENVIROFLEX_316_D
Kink protection cable:	Shrink-on sleeve, black, 20 mm
Attenuation Fmax:	2.21 dB

Connector data

Interface 1:	MCX
Interface gender 1:	M signal conductor male / plug
Version 1:	Straight
Interface 2:	SMA
Interface gender 2:	M signal conductor male / plug
Version 2:	Straight
Moment interface 2:	45 cNm [3.98 lbf·in]

Electrical data

Maximum frequency:	6 GHz
Impedance:	50 Ohm
Cable shielding:	Double
Maximum performance:	45 W
Performance coefficient:	110 EF316D
Dielectric strength:	0.75 kV
Attenuation coefficient a:	0,71820 EF316D
Attenuation coefficient b:	0,16820 EF316D

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

Learn more about
Test probes

ingun.com

PLUG AND CABLE