
Spring-loaded test probe

GKS-013 238 040 A 0800

Item GKS-013-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

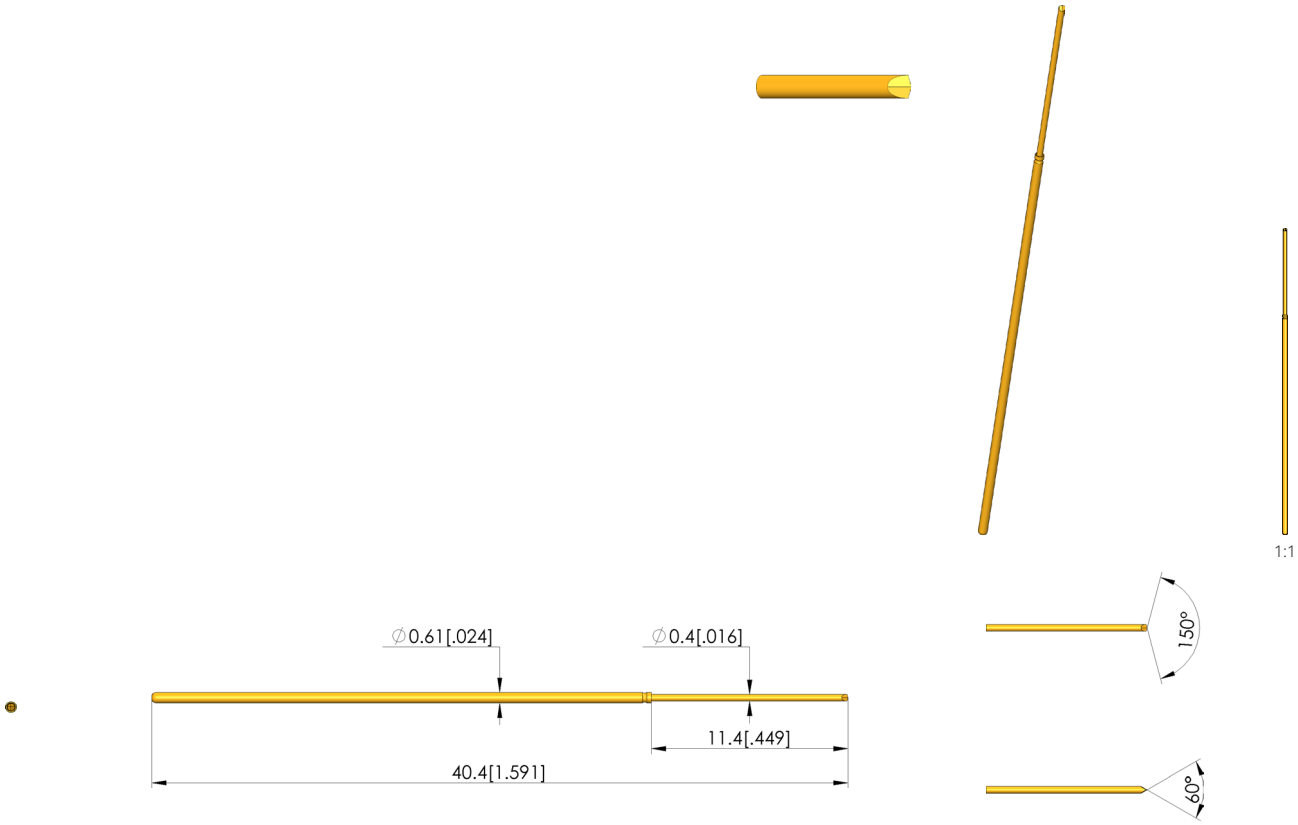

General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Long stroke GKS
Series:	GKS-013
Grid:	1 mm [40 mil]
Contacting from:	Pad, via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-040
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	<20 mOhm

Mechanical data

Total length:	40.4 mm [1.59 in]
Barrel diameter:	0.61 mm [.024 in]
Maximum stroke:	10 mm [.393 in]
Spring pre-load:	0.08 N [.287 ozf]
Collar height:	00
Spring force at working stroke:	0.8 N [2.87 ozf]
Recommended working stroke:	8 mm [.314 in]

Tip style data

Tip style:	38 150° passive dagger, self-cleaning
Tip diameter:	0.4 mm [.015 in]
Tip style surface:	A gold
Tip style material:	2 steel

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-013 238 040 A 0800

Item GKS-013-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

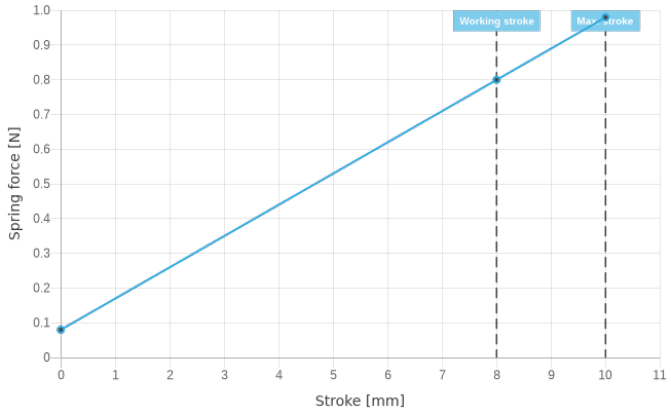

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB

Learn more about
ICT/FCT Test probes

ingun.com

ICT/FCT TEST PROBES