

High Current Probes

HCE08FB52S28E260

Item number 1052667

General

Design	Basic Contact Probe
Type/family	HCE08F
Pitch (mm/mil)	16,5 / 649
Temperature [C°]	-45°C...+200°C
Additional definition	B

Electrical specifications

Continuous current (A)	200.00
Typical contact resistance (mOhm)	1.00
Continuous current 2 (A)	2.00
Typical contact resistance 2 (mOhm)	10.00

Mechanical specifications


Preload (cN)	2320.00
Spring force (cN)	2800.00
Nominal travel (mm)	4.00
Maximum travel (mm)	5.00
Thread	M14X1
Tool size (mm)	14
DUT	CCS Typ 2 MALE

Dimensions

Total length (mm)	77.50
Projection height (mm)	45.50
Tip style diameter (mm)	8.00
Barrel diameter (mm)	12.50
Collar diameter (mm)	15.00
Press ring diameter (mm)	15.00
Tip style diameter 2 (mm)	7.95

Family drawing

All measurements are in mm.

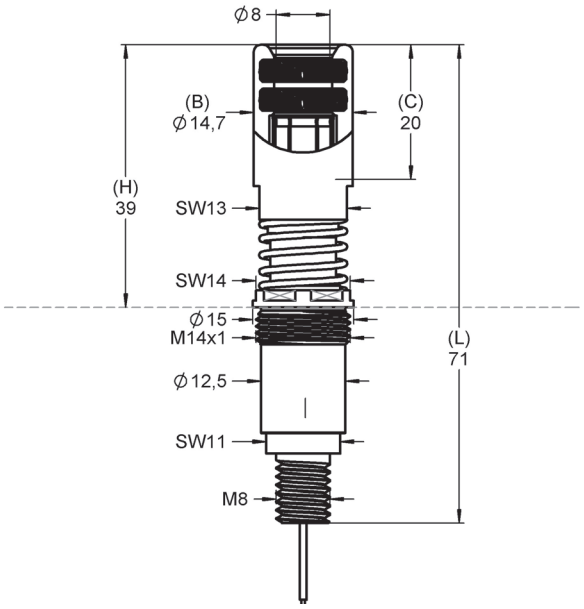

Materials & surfaces

Tip style	52
Tip style 2	55
Tip style material	Brass
Tip style plating	Silver
Plunger material	Brass
Plunger plating	Silver
Barrel material	Brass
Barrel plating	Uncoated
Spring material	High-grade steel
Spring plating	Uncoated