KS with a square post and press ring


KS-075 47 G

Item KS-07547G

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION





1:1



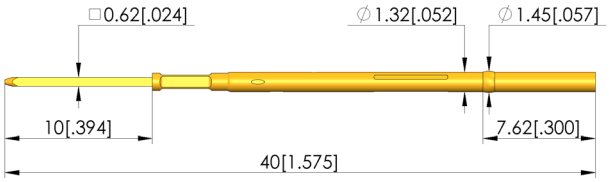

General data

Product group:	Receptacles (KS)
Series:	KS-075
Sub-series:	KS-075 press-in version
Type of receptacle connection:	Wire-wrap
Press ring:	Yes
Surface area:	Gold
Collar diameter:	1.47 mm [.057 in]
Collar height:	7.6 mm [.299 in]
Wire-wrap post length:	10 mm [.393 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	1.30 - 1.32 mm [.051 - .051 in]
Mounting hole in FR4:	1.31 - 1.33 mm [.051 - .052 in]
Mounting hole with press ring in CEM1:	1.39 - 1.40 mm [.054 - .055 in]
Mounting hole with press ring in FR4:	1.39 - 1.40 mm [.054 - .055 in]

Mechanical data

Total length:	40 mm [1.57 in]
Outer diameter:	1.32 mm [.051 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB