

Pogo Connectors

# P50011M400G400TL210ST

**Item number 1026783**

## General

| | |
|---|---|
| Design | Basic Contact Probe |
| Type/family | P-T / P500T-L210 |
| Pitch (mm/mil) | 6,50 / 256 |
| Temperature [C°] | -45°C...+200°C |

## Electrical specifications

| | |
|---|---|
| Continuous current (A) | 30.00 |
| Typical contact resistance (mOhm) | 30.00 |

## Mechanical specifications


| | |
|---|---|
| Preload (cN) | 120.00 |
| Spring force (cN) | 400.00 |
| Nominal travel (mm) | 4.80 |
| Maximum travel (mm) | 7.00 |
| Pointing accuracy +/- (mm) | 0.08 |

## Dimensions

| | |
|---|---|
| Total length (mm) | 21.00 |
| Projection height (mm) | 8.00 |
| Tip style diameter (mm) | 4.00 |
| Barrel diameter (mm) | 5.00 |
| Collar diameter (mm) | 6.00 |
| Press ring diameter (mm) | 6.00 |

## Family drawing

All measurements are in mm.

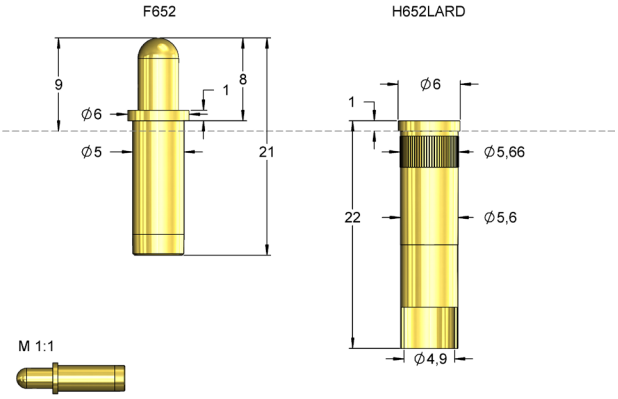


## Materials & surfaces

| | |
|---|---|
| Tip style | 11 |
| Tip style material | Brass |
| Tip style plating | Gold |
| Plunger material | Brass |
| Plunger plating | Gold |
| Barrel material | Brass |
| Barrel plating | Gold |
| Spring material | High-grade steel |
| Spring plating | Uncoated |