Receptacle A

KS-112 30 M-R-Z

Item KS-11230M-R-Z

GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION


Note:
The receptacle contains an axial bore for leakage testing. This can be closed by soldering on a cable. The receptacle is vacuum-tight after the soldering process. Caution: If handled incorrectly, solder can reach the inner surface of the receptacle.





1:1



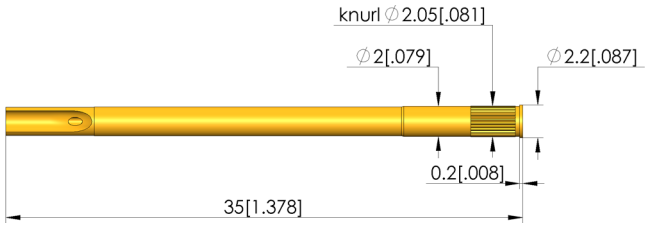

General data

Product group:	Receptacles (KS)
Series:	KS-112
Sub-series:	KS-112 M screw-in version
Type of receptacle connection:	Solder
Press ring:	No
Surface area:	Gold
Collar diameter:	2.2 mm [.086 in]
Collar height:	0.2 mm [.007 in]
Knurl:	Yes
Vacuum-tight:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	2.00 - 2.02 mm [.078 - .079 in]
Mounting hole in FR4:	2.00 - 2.02 mm [.078 - .079 in]

Mechanical data

Total length:	35 mm [1.37 in]
Outer diameter:	2 mm [.078 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB