Receptacle, pre-wired

KS-069 35 V-26

Item KS-06935V-26

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION





1:1



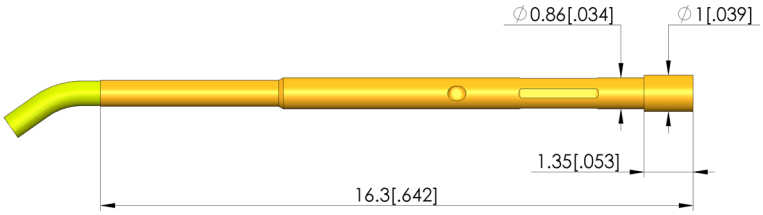

General data

Product group:	Receptacles (KS)
Series:	KS-069
Sub-series:	KS-069 press-in version
Type of receptacle connection:	Pre-wired
Press ring:	No
Surface area:	Gold
Collar diameter:	1 mm [.039 in]
Collar height:	1.35 mm [.053 in]
Knurl:	No
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	0.85 - 0.86 mm [.033 - .033 in]
Mounting hole in FR4:	0.85 - 0.86 mm [.033 - .033 in]

Mechanical data

Total length:	16.3 mm [.641 in]
Outer diameter:	0.86 mm [.033 in]

Wiring data

Wire type AWG:	26 FEP
Wire type:	Solid
Insulating material:	Tefzel
Wire outer diameter:	0.67 mm [.026 in]
Wire length:	1 m [39.3 in]
Wire diameter:	0.4 mm [.015 in]
Wire colour:	gelb
Kink protection:	No

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB